

Product Specification

10.3125Gb/s SR-I SFP+ 850nm 300m
Industrial Optical Transceiver

P/N: 10G-SFP-SR-I



Features

- Hot Pluggable SFP+ form factor
- Operating data rate 10.3125Gbps
- Single +3.3V power supply
- Duplex LC-UPC connector
- Max power dissipation <1.0W
- Maximum Link Length of 300m with 50/125 μ m MMF
- 850nm VCSEL laser
- PIN receivers
- Built-in digital diagnostic function
- Operating Temperature: Industrial -40°C~+85°C

Compliance

- SFP MSA
- Compliant with SFP+ Electrical MSA SFF-8431
- Compliant with SFP+ Mechanical MSA SFF-8432
- SFF-8472
- IEEE 802.3ae
- RoHS

Applications

- Switches with SFP+ ports
- Router with SFP+ Ports
- Server or Network Adapter Card
- Optical Transmission System
- Other devices with SFP+ Ports

Description

The 10G-SFP-SR-I is a high-performance, industrial-grade SFP+ transceiver designed to support link lengths of up to 400 meters over OM4 multimode fiber (300 meters over OM3). With its LC duplex connector, this transceiver provides reliable, high-speed connectivity for data centers and telecom networks. It is fully compliant with the SFF-8431, SFF-8432, and IEEE 802.3ae standards, ensuring seamless interoperability across various vendor equipment.

This transceiver supports digital diagnostics monitoring (DOM) through a 2-wire serial interface, as specified in SFF-8472, providing real-time status updates to help maintain network performance and reliability. With an extended operating temperature range of -40°C to 85°C, the 10G-SFP-SR-I is built to endure challenging environmental conditions, making it suitable for deployment in diverse industrial settings, from data centers to telecom networks.

The 10G-SFP-SR-I is engineered to excel in demanding environments such as telecommunications, industrial automation, outdoor applications, rail and intelligent transportation systems (ITS), as well as sectors like marine, oil and gas, and mining. Its rugged build and extended temperature tolerance make it the ideal choice for industrial-grade applications, delivering reliable performance even under harsh conditions.

Product performance Specifications

1. Basic Product Characteristics

| Parameter | Symbol | Min | Typ. | Max | Unit |
|----------------------------|-----------------|------|------|---------|------|
| Storage Temperature | T _s | -40 | - | +85 | °C |
| Supply Voltage | V _{CC} | -0.5 | - | 4 | V |
| Relative Humidity | RH | 0 | - | 85 | % |
| Operating Case Temperature | T _C | -40 | - | 85 | °C |
| Power Supply Voltage | V _{CC} | 3.13 | 3.3 | 3.46 | V |
| Power Supply Current | I _{CC} | | | 300 | mA |
| Power Dissipation | PD | - | - | 1000 | mW |
| Data Rate | | 1.25 | 9.95 | 10.3125 | Gbps |
| Transmission Distance(OM3) | - | 0.5 | - | 300 | m |
| Transmission Distance(OM4) | - | 0.5 | - | 400 | m |

2. Product Optical and Electrical Characteristics

| Parameter | Symbol | Min | Typ. | Max | Unit |
|--------------------|----------------|-----|------|------|------|
| Transmitter | | | | | |
| Center Wavelength | λ _C | 840 | 850 | 860 | nm |
| RMS Spectral Width | σ | | | 0.45 | nm |

| | | | | | |
|--|-------------------------|------|------|----------------------|------|
| Optical Power for TX DISABLE | P _{OFF} | | | -30 | dBm |
| Output average power ₁ | P _{AVG} | -6 | | -1 | dBm |
| Input Impedance (Differential) | Z _{in} | | 100 | | ohms |
| Extinction Ratio | ER | 3 | | | dB |
| TX_Disable Assert Time | t _{off} | | | 10 | us |
| TX_DISABLE Negate Time | t _{on} | | | 1 | ms |
| Transmitter Dispersion Penalty | TDP | | | 3.9 | dB |
| Optical Eye Mask | EEE802.3-2005 Compliant | | | | |
| LVPECL Inputs(Differential) | V _{in} | 180 | | 850 | mVpp |
| Tx Fault | High | 2 | | V _{CC} +0.3 | V |
| | Low | 0 | | 0.8 | |
| Tx_Disable | High | 2 | | V _{CC} | V |
| | Low | 0 | | 0.8 | V |
| Receiver | | | | | |
| Center Wavelength | λ _c | 840 | | 860 | nm |
| Receiver Sensitivity | P _{min} | | | -11.1 | dBm |
| Receiver Overload ₂ | P _{max} | -1 | | | dBm |
| Return Loss | ORL | | | -12 | dB |
| LOS De-Assert | LOSD | | | -12.5 | dBm |
| LOS Assert | LOSA | -25 | | | dBm |
| LOS-Hysteresi | Phys | 0.5 | | | dB |
| CML Outputs (Differential) | V _{out} | 300 | | 850 | mVpp |
| Rx Output Diff Voltage | V _o | 300 | | 850 | mV |
| Rx_LOS | V _{oL} | 2 | | V _{CC} +0.3 | V |
| | I _{oH} | 0 | | 0.8 | uA |
| MOD_DEF(0.2) | V _{IL} | -0.3 | | 0.8 | V |
| | V _{IH} | 2 | | V _{CC} +0.3 | V |
| 0.65μm Core Diameter MMF OM1 200 MHz-km | L | | | 33 | m |
| 50μm Core Diameter MMF OM3 2000 MHz-km | L | | | 300 | m |
| 50μm Core Diameter MMF OM4 4700MHz-km | L | | | 400 | m |
| Data Rate | | 1.25 | 9.95 | 10.3125 | Gbps |

Note1: Average Power figures are informative only, per IEEE802.3a

Note2: Minimum average optical power measured at the BER less than 1E-12,back to back.The measure pattern is PRBS2^31-1.

Recommended Host Board Power Supply Circuit

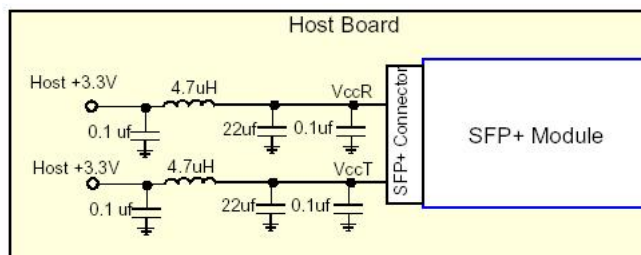


Figure 1: Recommended Host Board Power Supply Circuit

Recommended Interface Circuit

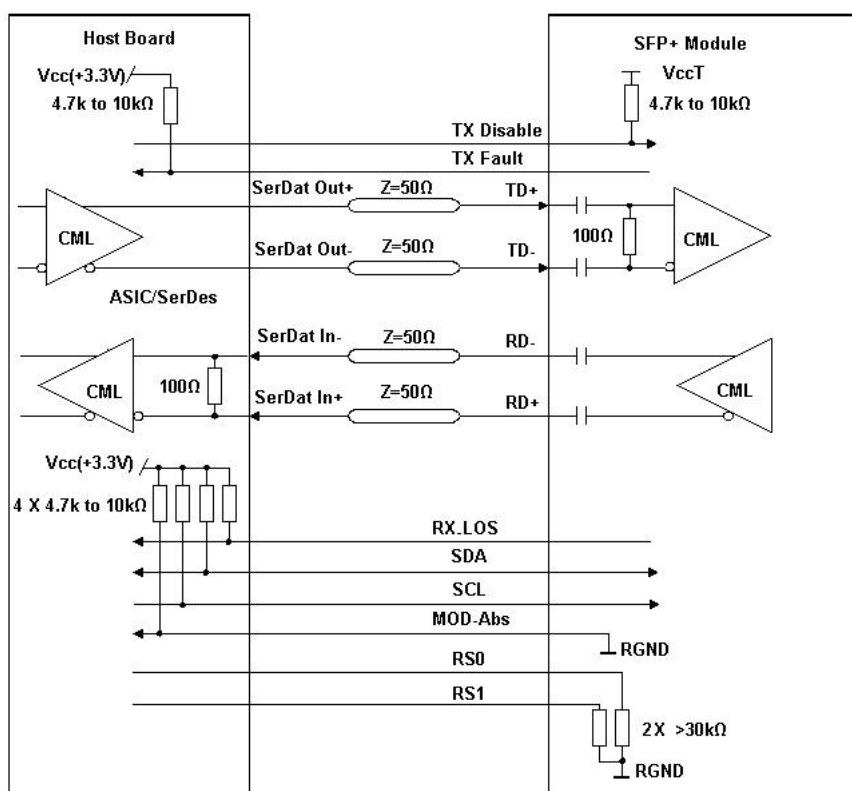


Figure 2: Recommended Interface Circuit

Pin-out Definition

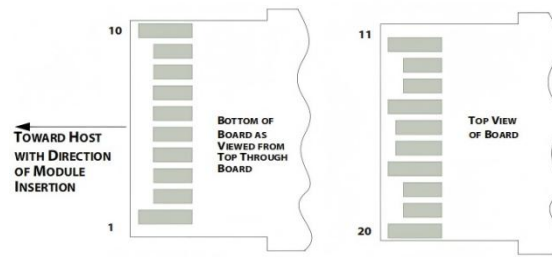


Figure3:Pin view

Pin Function Definitions

| Pin | Logic | Symbol | Description | Note |
|-----|-----------|------------|--|------|
| 1 | | VeeT | Module Transmitter Ground | 1 |
| 2 | LVTTL-O | TX_Fault | Module Transmitter Fault | 2 |
| 3 | LVTTL-I | TX_Disable | Transmitter Disable; Turns off transmitter laser output | 3 |
| 4 | LVTTL-I/O | SDA | 2-wire Serial Interface Data Line (Same as MOD-DEF2 as defined in the INF-8074i) | 4 |
| 5 | LVTTL-I/O | SCL | 2-wire Serial Interface Clock (Same as MOD-DEF1 as defined in the INF-8074i) | 4 |
| 6 | | MOD_ABS | Module Absent, connected to VeeT or VeeR in the module | 5 |
| 7 | LVTTL-I | RS0 | Adaptive multi-rate operation | 6 |
| 8 | LVTTL-O | RX_LOS | Receiver Loss of Signal Indication (In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect) | 2 |
| 9 | LVTTL-I | RS1 | Adaptive multi-rate operation | 6 |
| 10 | | VeeR | Module Receiver Ground | 1 |
| 11 | | VeeR | Module Receiver Ground | 1 |
| 12 | CML-O | RD- | Receiver Inverted Data Output | |
| 13 | CML-O | RD+ | Receiver Non-Inverted Data Output | |
| 14 | | VeeR | Module Receiver Ground | 1 |
| 15 | | VccR | Module Receiver 3.3 V Supply | |
| 16 | | VccT | Module Transmitter 3.3 V Supply | |
| 17 | | VeeT | Module Transmitter Ground | 1 |
| 18 | CML-I | TD+ | Transmitter Non-Inverted Data Input | |
| 19 | CML-I | TD- | Transmitter Inverted Data Input | |
| 20 | | VeeT | Module Transmitter Ground | 1 |

Note1: The module signal ground pins, VeeR and VeeT, shall be isolated from the module case.

Note2: This pin is an open collector/drain output pin and shall be pulled up with 4.7k Ω -10k Ω to Host_Vcc on the host board. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module VccT/R + 0.5V.

Note3: This pin is an open collector/drain input pin and shall be pulled up with 4.7k Ω -10k Ω to VccT in the module.

Note4: See SFF-8431 4.2 2-wire Electrical Specifications.

Note5: This pin shall be pulled up with 4.7k Ω -10k Ω to Host_Vcc on the host board.

Note6: Connect with 30k Ω load pulled down to GND in the module.

Monitoring Specification

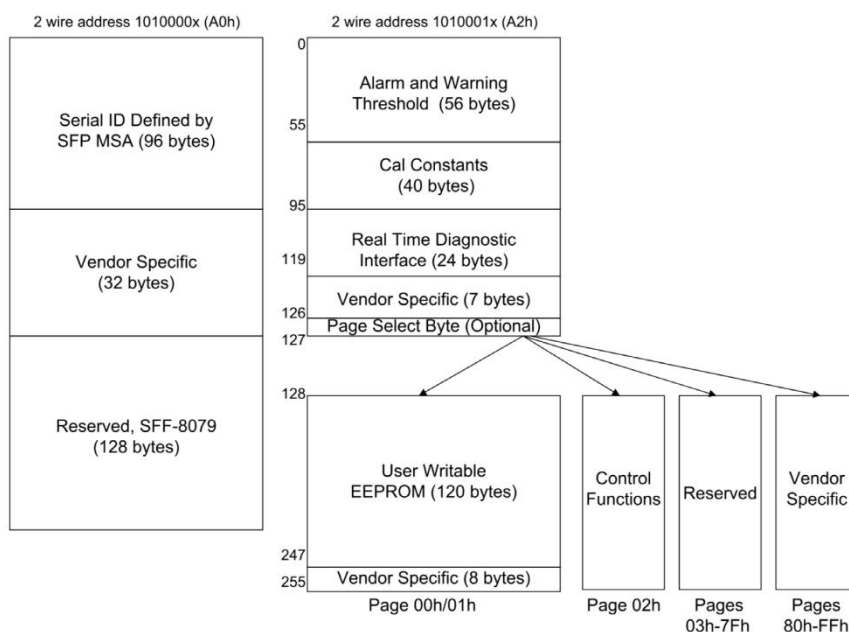


Figure4:Memory map

Memory map Table


| A0h | Bytes | Name | Description |
|----------------------|-------|---------------------------------|---|
| A0h ID Fields | | | |
| 0 | 1 | Identifier | Type of transceiver |
| 1 | 1 | Ext. Identifier | Extended identifier of type of transceiver |
| 2 | 1 | Connector | Code for connector type |
| 3-10 | 8 | Transceiver | Code for electronic or optical compatibility |
| 11 | 1 | Encoding | Code for high speed serial encoding algorithm |
| 12 | 1 | Signaling Rate, Nominal | Nominal signaling rate, units of 100 MBd. |
| 13 | 1 | Rate Identifier | Type of rate select functionality |
| 14 | 1 | Length (SMF,km) or Copper Cable | Link length supported for single-mode fiber, units of km, or copper |

| | | Attenuation | cable attenuation in dB at 12.9 GHz |
|----------------------|-----|--|--|
| 15 | 1 | Length (SMF) or Copper Cable Attenuation | Link length supported for single-mode fiber, units of 100 m, or copper cable attenuation in dB at 25.78 GHz |
| 16 | 1 | Length (50 um, OM2) | Link length supported for 50 um OM2 fiber, units of 10 m |
| 17 | 1 | Length (62.5 um, OM1) | Link length supported for 62.5 um OM1 fiber, units of 10 m |
| 18 | 1 | Length (OM4 or copper cable) | Link length supported for 50um OM4 fiber, units of 10 m. Alternatively, copper or direct attach cable, units of m |
| 19 | 1 | Length (OM3) or Cable length, additional | Link length supported for 50 um OM3 fiber, units of 10 m. Alternatively, copper or direct attach cable multiplier and base value |
| 20-35 | 16 | Vendor name | SFP vendor name (ASCII) |
| 36 | 1 | Transceiver | Code for electronic or optical compatibility |
| 37-39 | 3 | Vendor OUI | SFP vendor IEEE company ID |
| 40-55 | 16 | Vendor PN | Part number provided by SFP vendor (ASCII) |
| 56-59 | 4 | Vendor rev | Revision level for part number provided by vendor (ASCII) |
| 60-61 | 2 | Wavelength | Laser wavelength (Passive/Active Cable Specification Compliance) |
| 62 | 1 | Fibre Channel Speed 2 | Transceiver's Fibre Channel speed capabilities |
| 63 | 1 | CC_BASE | Check code for Base ID Fields (addresses 0 to 62) |
| 64-65 | 2 | Options | Indicates which optional transceiver signals are implemented |
| 66 | 1 | Signaling Rate, max | Upper signaling rate margin, units of % |
| 67 | 1 | Signaling Rate, min | Lower signaling rate margin, units of % |
| 68-83 | 16 | Vendor SN | Serial number provided by vendor (ASCII) |
| 84-91 | 8 | Date code | Vendor's manufacturing date code |
| 92 | 1 | Diagnostic Monitoring Type | Indicates which type of diagnostic monitoring is implemented (if any) in the transceiver |
| 93 | 1 | Enhanced Options | Indicates which optional enhanced features are implemented (if any) in the transceiver |
| 94 | 1 | SFF-8472 Compliance | Indicates which revision of SFF-8472 the transceiver complies with. |
| 95 | 1 | CC_EXT | Check code for the Extended ID Fields (addresses 64 to 94) |
| 96-127 | 32 | Vendor Specific | Vendor Specific EEPROM |
| 128-255 | 128 | Reserved | Reserved (was assigned to SFF-8079) |
| A2h ID Fields | | | |
| 00-01 | 2 | Temp High Alarm | MSB at low address |
| 02-03 | 2 | Temp Low Alarm | MSB at low address |
| 04-05 | 2 | Temp High Warning | MSB at low address |
| 06-07 | 2 | Temp Low Warning | MSB at low address |
| 08-09 | 2 | Voltage High Alarm | MSB at low address |
| 10-11 | 2 | Voltage Low Alarm | MSB at low address |
| 12-13 | 2 | Voltage High Warning | MSB at low address |
| 14-15 | 2 | Voltage Low Warning | MSB at low address |

| | | | |
|---------|----|---|--|
| 16-17 | 2 | Bias High Alarm | MSB at low address |
| 18-19 | 2 | Bias Low Alarm | MSB at low address |
| 20-21 | 2 | Bias High Warning | MSB at low address |
| 22-23 | 2 | Bias Low Warning | MSB at low address |
| 24-25 | 2 | TX Power High Alarm | MSB at low address |
| 26-27 | 2 | TX Power Low Alarm | MSB at low address |
| 28-29 | 2 | TX Power High Warning | MSB at low address |
| 30-31 | 2 | TX Power Low Warning | MSB at low address |
| 32-33 | 2 | RX Power High Alarm | MSB at low address |
| 34-35 | 2 | RX Power Low Alarm | MSB at low address |
| 36-37 | 2 | RX Power High Warning | MSB at low address |
| 38-39 | 2 | RX Power Low Warning | MSB at low address |
| 40-41 | 2 | Optional Laser Temp High Alarm | MSB at low address |
| 42-43 | 2 | Optional Laser Temp Low Alarm | MSB at low address |
| 44-45 | 2 | Optional Laser Temp High Warning | MSB at low address |
| 46-47 | 2 | Optional Laser Temp Low Warning | MSB at low address |
| 48-49 | 2 | Optional TEC Current High Alarm | MSB at low address |
| 50-51 | 2 | Optional TEC Current Low Alarm | MSB at low address |
| 52-53 | 2 | Optional TEC Current High Warning | MSB at low address |
| 54-55 | 2 | Optional TEC Current Low Warning | MSB at low address |
| 56-91 | 36 | Ext Cal Constants or Additional Enhanced Features | Diagnostic calibration constants for optional External Calibration if External Calibration bit, A0h, byte 92, bit 4 is 1 Additional Enhanced Features advertisement, control and status if External Calibration bit, A0h, byte 92, bit 4 is 0 |
| 92-94 | 3 | Reserved | |
| 95 | 1 | CC_DMI | Check code for Base Diagnostic Fields (addresses 0 to 94) |
| 96-105 | 10 | Diagnostics | Diagnostic Monitor Data (internally or externally calibrated) |
| 106-109 | 4 | Optional Diagnostics | Monitor Data for Optional Laser temperature and TEC current |
| 110 | 1 | Status/Control | Optional Status and Control Bits |
| 111 | 1 | Reserved | Reserved (was assigned to SFF-8079) |
| 112-113 | 2 | Alarm Flags | Diagnostic Alarm Flag Status Bits |
| 114 | 1 | Tx Input EQ control | Tx Input equalization level control |
| 115 | 1 | Rx Out Emphasis control | Rx Output emphasis level control |
| 116-117 | 2 | Warning Flags | Diagnostic Warning Flag Status Bits |
| 118-119 | 2 | Ext Status/Control | Extended module control and status bytes |
| 120-126 | 7 | Vendor Specific | Vendor specific memory addresses |
| 127 | 1 | Table Select | Optional Page Select |

| | | | |
|--------------|-----|-----------------------|---|
| 128-247 | 120 | User EEPROM | User writable non-volatile memory |
| 248-255 | 8 | Vendor Control | Vendor specific control addresses |
| A2h Page 02h | | | |
| 128-129 | 2 | Reserved | Reserved for SFF-8690 (Tunable Transmitter) |
| 130 | 1 | Reserved | Reserved for future receiver controls |
| 131 | 1 | Rx Decision Threshold | RDT value setting |
| 132-172 | 41 | Reserved | Reserved for SFF-8690 |
| 173-255 | 83 | Reserved | Reserved |

Mechanical Dimension

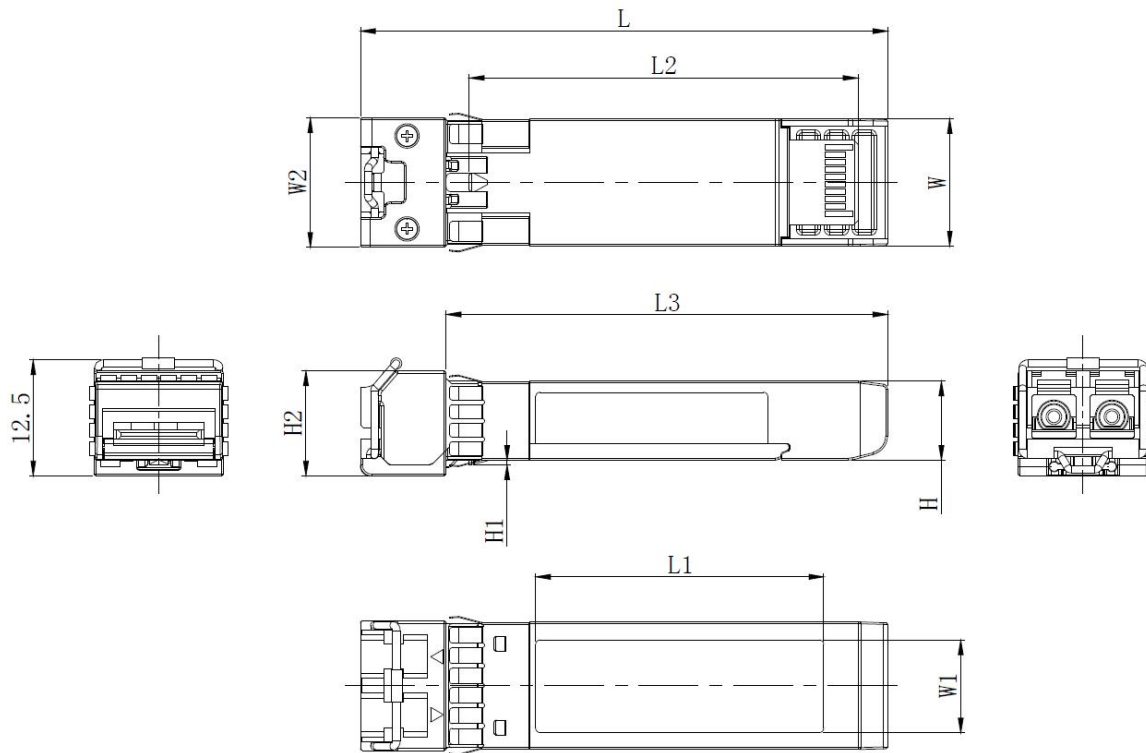


Unit: mm

| | L | L1 | L2 | L3 | W | W1 | W2 | H | H1 | H2 |
|---------|------|------|-------|------|------|------|------|-----|-----|------|
| MAX | 56.9 | 31.2 | 41.95 | 47.7 | 13.8 | 10.2 | 14.0 | 8.6 | 0.6 | 11.5 |
| Typical | 56.7 | 31.0 | 41.80 | 47.5 | 13.7 | 10.0 | — | 8.5 | 0.5 | 11.3 |
| MIN | 56.5 | 30.8 | 41.65 | 47.3 | 13.5 | 9.8 | — | 8.4 | 0.4 | 11.1 |

Test Center

1. Performance Testing

Every fiber optic transceiver is thoroughly tested by the LSOLINK Assurance Program, which is equipped with the world's most advanced analytical equipment to ensure that our transceivers meet the industry's international public protocol standards while still functioning flawlessly in your facility.

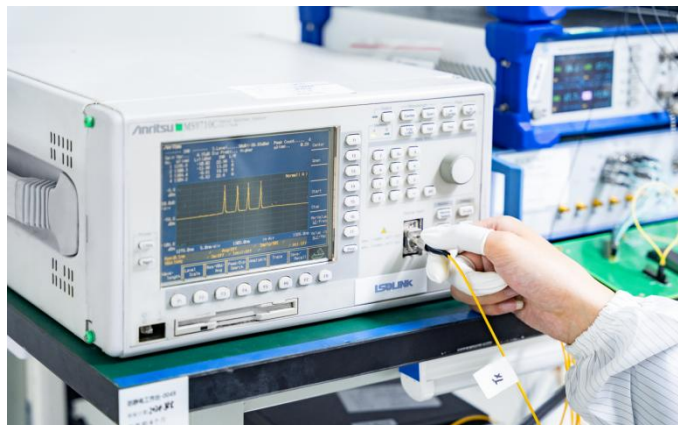

Optical Spectrum Inspection

Using the industry's leading optical spectrum analyser to check in real time that the parameters of the optical transceiver's laser comply with industry standards.

- **Peak:** Peak wavelength and peak level
- **2nd Peak:** Side-mode wavelength and level
- **Mean Wl:** Center wavelength
- **Total Power:** Total power of spectrum
- **SMSR:** Side-Mode Suppression Ratio



Optical Signal Quality Inspection

Using highly efficient sampling oscilloscopes and BERT testers, equipped with an automated test platform to accurately test the signal quality of the transceiver, test records are kept for up to 5 years to ensure the traceability of each transceiver.

- **Eye Mask Margin(NRZ)**
- **TDECQ(PAM4):**transmitter dispersion eye closure
- **OMA:** Optical modulation amplitude
- **BER:** Bit error rate
- **ER:** Extinction Ratio



Flow Pressure Test

Using multi-protocol network traffic analyser with various brands of switches to test the transceiver's ability to transmit at full speed.

- **Bandwidth:** Actual transceiver bandwidth on the port
- **Packet Loss**
- **Packet Errors:**CRC Errors/PCS Errors/Symbol Errors
- **LinkDown Counts**
- **latency**

Above is part of our test bed network equipment. For more information, Please click [download](#) for optical transceiver performance test report.

2. Quality Control

We adopt advanced quality management solutions. Each transceiver is self-inspected, including: 20x microscope inspection, 200x microscope inspection, and QC process inspection.



visual inspection



Microscopic inspection: 20X



Microscopic inspection: 200X



Reliability Verification



Optical endface inspection



OQC Inspection

3. Compatibility Testing

Each optical transceiver is tested in LSOLINK's library of compatibility test equipment to ensure perfect compatibility with multiple brands on the market.



HPE Flex Fabric 5900AF-48G-4XG-2QSFP+




Dell S4048-ON



Cisco Nexus N9K-C9318YC-EX



Ubiquiti ES-48-Lite

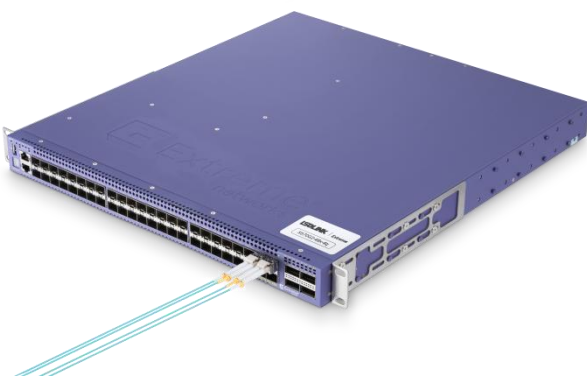

Extreme X670-G2-48X-4Q



Brocade ICX-7750-48F

Above is part of our test bed network equipment. For more information, Please click [download](#) to get the compatibility test report of each brand of optical transceiver.


Order Information

| Part Number | Description |
|--------------|---|
| 10G-SFP-T-30 | 10GBASE-T SFP+Cooper RJ45 30m Transceiver Module |
| 10G-SFP-T-80 | 10GBASE-T SFP+Cooper RJ45 80m Transceiver Module |
| 10G-SFP-SR | 10GBASE-SR SFP+850nm 300m DOM LC MMF Transceiver Module |
| 10G-SFP-IR | 10GBASE-IR SFP+ 1310nm 2km DOM LC SMF Transceiver Module |
| 10G-SFP-LR | 10GBASE-LR SFP+1310nm 10km DOM LC SMF Transceiver Module |
| 10G-SFP-ER | 10GBASE-ER SFP+1550nm 40km DOM LC SMF Transceiver Module |
| 10G-SFP-ZR | 10GBASE-ZR SFP+1550nm 80km DOM LC SMF Transceiver Module |
| 10G-SFP-SR-I | 10GBASE-SR SFP+ 850nm 300m DOM LC MMF Industrial-Temp Transceiver Module |
| 10G-SFP-LR-I | 10GBASE-LR SFP+ 1310nm 10km DOM LC SMF Industrial-Temp Transceiver Module |
| 10G-SFP-ER-I | 10GBASE-ER SFP+ 1550nm 40km DOM LC SMF Industrial-Temp Transceiver Module |

Further Information

 | Lighting the Path to Global Links

 **Web** | www.lsolink.com

 **Email** | For Sales@lsolink.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. LSOLINK assumes no responsibility for the use or reliability of equipment or software not provided by LSOLINK. Copyright LSOLINK.COM All Rights