

# Product Specification

212.5Gb/s QSFP56 FR4 1310nm 2km  
Optical Transceiver

P/N: HDR-Q56-FR4



## Features

- Hot Pluggable QSFP56 form factor
- Operating data rate 212.5Gb/s
- Single +3.3V power supply
- LC duplex connector
- Max power dissipation 6.5W
- Up to 2km transmission on single mode fiber
- PIN receivers
- Built-in digital diagnostic function
- Commercial temperature range 0°C to 70°C

## Compliance

- QSFP56 MSA
- Compliant with QSFP Electrical MSA SFF-8636
- Compliant with QSFP Mechanical MSA SFF-8665
- IEEE 802.3bm
- RoHS

## Applications

- Supports 200Gb InfiniBand HDR Systems
- Router with QSFP56 Ports
- Server or Network Adapter Card
- Optical Transmission System
- Other devices with QSFP56 Ports

## Description

The HDR-Q56-FR4 is a 200G InfiniBand HDR optical transceiver designed for high-performance, long-reach interconnects in AI/ML clusters and hyperscale data centers. Leveraging QSFP56 encapsulation and 4×50G PAM4 modulation, it delivers 200Gb/s bandwidth over single-mode fiber (SMF) via LC-DX duplex interfaces, achieving transmission distances up to 2km with <4ns latency. Compatible with NVIDIA MMS1W50-HM specifications, this module integrates EML lasers and APD receivers, ensuring <5W power consumption and error-free performance in HDR InfiniBand fabrics. It supports breakout configurations for 4×50G connectivity, enabling seamless backward compatibility with 100G EDR networks.

Optimized for NVIDIA Quantum-2 platforms, the HDR-Q56-FR4 features DSP-free architecture and compliance with IEEE 802.3bs/CMIS 5.0 standards. Its design minimizes insertion loss (<3dB) and crosstalk while supporting RDMA protocols for MPI-intensive workloads. With built-in DDM/DOM diagnostics and RoHS-6 certification, it reduces cabling complexity by 50% compared to copper alternatives, making it ideal for distributed HPC, cloud R&D, and storage networks requiring <5μs latency and >99.999% reliability. The module's thermal efficiency (-5°C to 70°C operating range) ensures stable operation in demanding environments.

## Product performance Specifications

### 1. Basic Product Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit
Absolute Maximum Ratings					
Storage Temperature	T <sub>s</sub>	-40	-	85	°C
Relative Humidity (non-condensing)	RH	15	-	85	%
Supply Voltage	V <sub>cc</sub>	-0.5	-	3.6	V
Operational Specifications					
Operating temperature (Case)	T <sub>c</sub>	0	-	70	°C
Bit Rate (all wavelengths combined)	BR	-	-	212.5	Gbps
Bit Error Ratio	BER	-	-	2.4x10 <sup>-4</sup>	
Reach on SMF OS1 fiber per G.652	L <sub>max</sub> (OS1)	-	-	1000	m
Reach on SMF OS2 fiber per G.652	L <sub>max</sub> (OS2)	-	-	2000	m

## 2. Product Optical and Electrical Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit	Note
Power consumption	$P_D$	-	-	6.5	W	
Transmitter						
Signaling rate per lane		-100ppm	26.5625	+100ppm	GBd	
Differential data input voltage per lane	$V_{in,pp,diff}$	900	-	-	mV	
Differential termination mismatch		-	-	10	%	
Single-ended voltage tolerance range		-0.4	-	3.3	V	
DC common mode voltage		-350	-	2850	mV	1
Signaling rate (each lane (range))		-100ppm	26.5625	+100ppm	GBd	
Modulation format		PAM4				
Lane wavelength (range)		1264.5	1271	1277.5	nm	
		1284.5	1291	1297.5		
		1304.5	1311	1317.5		
		1324.5	1331	1337.5		
Side-mode suppression ratio (SMSR)		30	-	-	dB	
Total average launch power		-	-	10.7	dBm	
Average launch power, each lane		-4.2	-	4.7	dBm	2
Difference in launch power between any two lanes (OMA <sub>outer</sub> ) max		-	-	4	dB	
Outer Optical Modulation Amplitude (OMA <sub>outer</sub> ), each lane		-1.2	-	4.5	dBm	3
Launch power in OMA <sub>outer</sub> minus TDECQ, each lane		-2.5	-	-	dBm	
Transmitter and dispersion eye closure for PAM4 (TDECQ), each lane		-	-	3.3	dB	
Average launch power of OFF transmitter, each lane		-	-	-30	dBm	
Extinction ratio		3.5	-	-	dB	
RIN <sub>17.1OMA</sub>		-	-	-132	dB/Hz	
Optical return loss tolerance		-	-	17.1	dB	
Transmitter reflectance		-	-	-26	dB	4

Receiver						
Signaling rate per lane		-100ppm	26.5625	+100ppm	GBd	
AC common-mode output voltage (RMS)		-	-	17.5	mV	
Differential output voltage		-	-	900	mV	
Near-end ESMW (Eye symmetry mask width)		0.265	-	-	UI	
Near-end Eye height, differential (min)		70	-	-	mV	
Far-end ESMW (Eye symmetry mask width)		0.2	-	-	UI	
Far-end Eye height, differential (min)		30	-	-	mV	7
Far-end pre-cursor ISI ratio		-4.5	-	2.5	%	
Differential termination mismatch		-	-	10	%	
Transition time (min, 20% to 80%)		9.5	-	-	ps	
DC common mode voltage (min)		-350	-	2850	mV	1
Signaling rate (each lane (range))		-100ppm	26.5625	+100ppm	GBd	
Modulation format		PAM4				
Lane wavelength (range)		1264.5	1271	1277.5	nm	
		1284.5	1291	1297.5		
		1304.5	1311	1317.5		
		1324.5	1331	1337.5		
Damage threshold, each lane		5.7	-	-	dBm	5
Average receive power, each lane		-8.2	-	4.7	dBm	6
Difference in receive power between any two lanes (OMAouter)		-	-	4.1	dB	
Receiver reflectance		-	-	-26	dB	
Receiver sensitivity (OMAouter), each lane		-	-	-6.5	dBm	7
Stressed receiver sensitivity (OMAouter), each lane		-	-	-3.6	dBm	
Test Conditions(note 6)						
Stressed eye closure for PAM4 (SECQ), lane under test		3.3	-	-	dB	
OMAouter of each aggressor lane		0.5	-	-	dBm	
LOS De-Assert		-	-	-9	dBm	
LOS Assert		-22	-	-12	dBm	
LOS Hysteresis		0.5	-	-	dB	

**Note1:** DC common mode voltage generated by the host. Specification includes effects of ground offset voltage.

**Note2:** Average launch power, each lane (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.

**Note3:** Even if the TDECQ < 1.4 dB for an extinction ratio of 4.5 dB or TDECQ < 1.3 dB for an extinction ratio of < 4.5 dB, the OMA<sub>outer</sub> (min) must exceed this value.

**Note4:** Transmitter reflectance is defined looking into the transmitter.


**Note5:** The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level.

**Note6:** Average receive power, each lane (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.

**Note7:** Receiver sensitivity (OMA<sub>outer</sub>), each lane (max) is informative and is defined for a transmitter with SECQ up to 1.4 dB.


**Note8:** These test conditions are for measuring stressed receiver sensitivity. They are not characteristics of the receiver.

## Recommended Host Board Power Supply Circuit

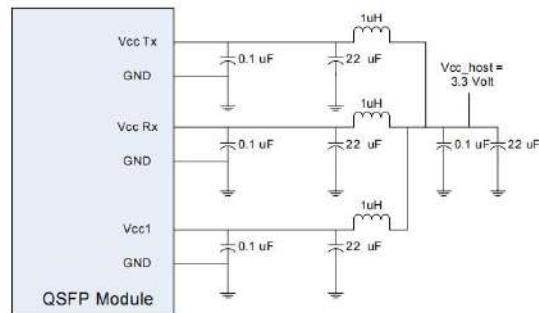

**Figure 1:**Recommended Host Board Power Supply Circuit

## Recommended Interface Circuit

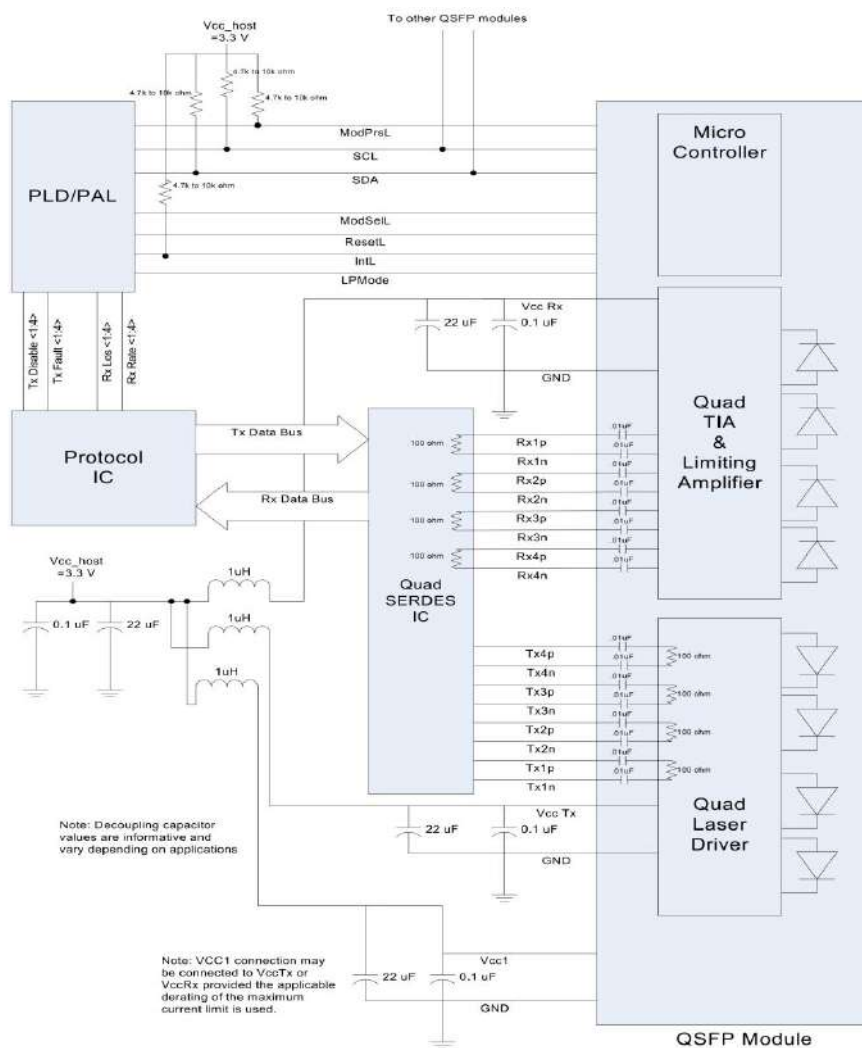

**Figure2:**Recommended Interface Circuit

## Optical Interface

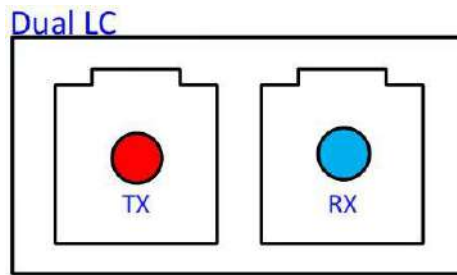


Figure3:Optical Lane Sequence

## Pin-out Definition

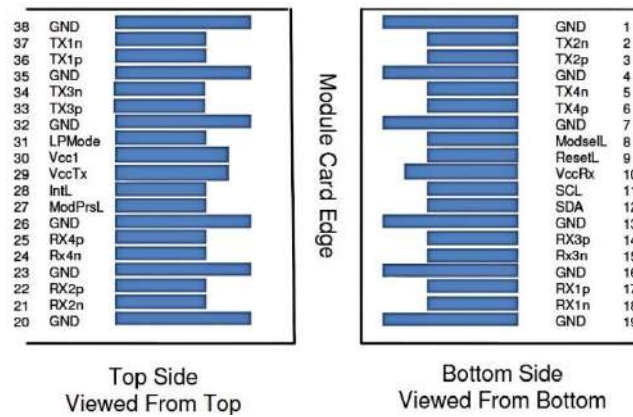


Figure4:Pin view

## Pin Function Definitions

Pin	Logic	Symbol	Description	Note
1		GND	Ground	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3
3	CML-I	Tx2p	Transmitter Non-Inverted Data Input	3
4		GND	Ground	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3
6	CML-I	Tx4p	Transmitter Non-Inverted Data Input	3
7		GND	Ground	1
8	LVTTL-I	ModSelL	Module Select	4
9	LVTTL-I	ReSelL	Module Select	4
10		Vcc Rx	+3.3V Power Supply Receiver	2
11	LVC MOS-I/O	SCL	2-wire serial interface clock	4
12	LVC MOS-I/O	SDA	2-wire serial interface data	4
13		GND	Ground	1
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	3

15	CML-O	Rx3n	Receiver Inverted Data Output	3
16		GND	Ground	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3
18	CML-O	Rx1n	Receiver Inverted Data Output	3
19		GND	Ground	1
20		GND	Ground	1
21	CML-O	Rx2n	Receiver Inverted Data Output	3
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3
23		GND	Ground	1
24	CML-O	Rx4n	Receiver Inverted Data Output	3
25	CML-O	Rx4p	Receiver Non-Inverted Data Output Ground	3
26		GND	Ground	1
27	LVTTL-O	ModPrsL	Module Present	4
28	LVTTL-O	IntL	Interrupt	4
29		Vcc Tx	+3.3V Power supply transmitter	2
30		Vcc1	+3.3V Power supply	2
31	LVTTL-I	LPMODE	Low Power Mode	4
32		GND	Ground	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	3
34	CML-I	Tx3n	Transmitter Inverted Data Input	3
35		GND	Ground	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3
37	CML-I	Tx1n	Transmitter Inverted Data Input	3
38		GND	Ground	1

**Note1:** GND is the symbol for signal and supply (power) common for the QSFP+ module. All are common within the QSFP+ module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.

**Note2:** Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in Table. Recommended host board power supply filtering is shown in Host board power supply circuit. Vcc Rx Vcc1 and Vcc Tx may be internally connected within the QSFP module in any combination. The connector pins are each rated for a maximum current of 500 mA.

**Note3:** High-speed signal interfaces require differential pairs (e.g. TX1+/TX1-) with tightly matched impedances (typically 100Ω).

**Note4:** The management and control signals are based on LVTTL level logic and are used for functions such as module selection and reset.



## Monitoring Specification

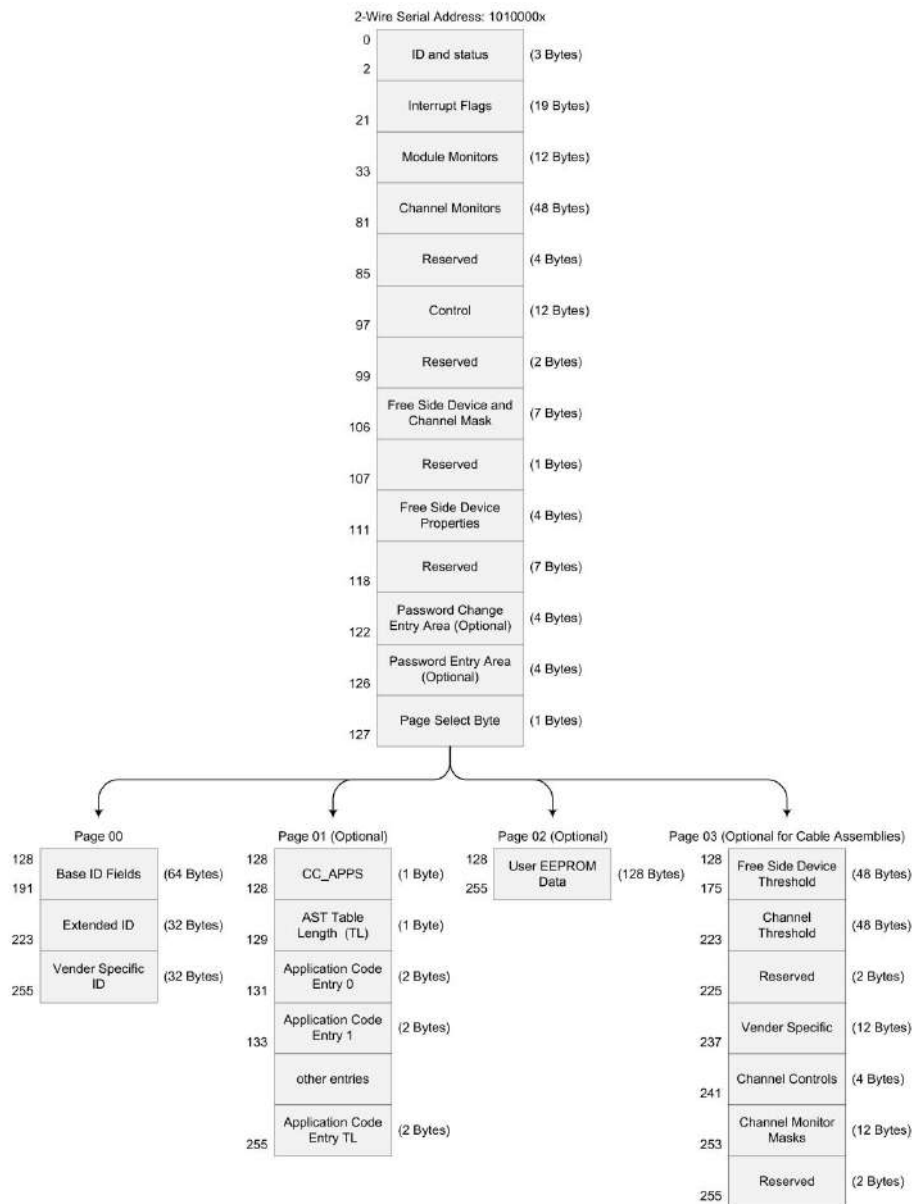


Figure5:Memory map

## Memory map Table

Byte	Unit	Name	Description
Lower Page 00h			
0	1	Identifier	Type of transceiver,Page 00h Byte 0 and Page 00h Byte 128 shall contain the same parameter values.
1	1	Status	Revision Compliance
2	1	Status	Status indicators

3-21	19	Interrupt Flags	Consist of interrupt flags for LOS, Tx Fault, warnings and alarms. The non-asserted state shall be 0b.
22	1	Temperature MSB	Internally measured temperature (MSB)
23	1	Temperature LSB	Internally measured temperature (LSB)
24-25	2	Reserved	Reserved
26	1	Supply Voltage MSB	Internally measured supply voltage (MSB)
27	1	Supply Voltage LSB	Internally measured supply voltage (LSB)
28-29	2	Reserved	Reserved
30-33	4	Vendor Specific	Vendor Specific
34	1	Rx1 Power MSB	Internally measured Rx1 input power
35	1	Rx1 Power LSB	
36	1	Rx2 Power MSB	Internally measured Rx2 input power
37	1	Rx2 Power LSB	
38	1	Rx3 Power MSB	Internally measured Rx3 input power
39	1	Rx3 Power LSB	
40	1	Rx4 Power MSB	Internally measured Rx4 input power
41	1	Rx4 Power LSB	
42	1	Tx1 Bias MSB	Internally measured Tx1 bias
43	1	Tx1 Bias LSB	
44	1	Tx2 Bias MSB	Internally measured Tx2 bias
45	1	Tx2 Bias LSB	
46	1	Tx3 Bias MSB	Internally measured Tx3 bias
47	1	Tx3 Bias LSB	
48	1	Tx4 Bias MSB	Internally measured Tx4 bias
49	1	Tx4 Bias LSB	
50	1	Tx1 Power MSB	Internally measured Tx1 Power
51	1	Tx1 Power LSB	
52	1	Tx2 Power MSB	Internally measured Tx2 Power
53	1	Tx2 Power LSB	
54	1	Tx3 Power MSB	Internally measured Tx3 Power
55	1	Tx3 Power LSB	
56	1	Tx4 Power MSB	Internally measured Tx4 Power
57	1	Tx4 Power LSB	
58-65	8	Reserved	Reserved channel monitor set 4
66-73	8	Reserved	Reserved channel monitor set 5
74-81	8	Vendor Specific	Vendor Specific
82-85	4	Reserved	Reserved
86-99	14	Control	Control
100-106	7	Free Side Device and Channel Masks	Free Side Device and Channel Masks
107-110	4	Free Side Device Properties	Free Side Device Properties

111-112	2	Assigned for use by PCI Express	Used for:
			- The PCI Express External Cable Specification
			- The PCI Express OCuLink Specification
113-117	4	Free Side Device Properties	Free Side Device Properties
118	1	Reserved	Reserved
119-122	4	Password Change Entry Area	Password Change Entry Area
123-126	4	Password Entry Area	Password Entry Area
127	1	Page Select Byte	Page Select Byte
Upper Page 00h			
128	1	Identifier	Identifier Type of free side device.(See SFF-8024 Transceiver Management)
129	1	Ext. Identifier	Extended Identifier of free side device. Includes power classes, CLEI codes, CDR capability.
130	1	Connector Type	Code for media connector type. (See SFF-8024 Transceiver Management)
131-138	8	Specification Compliance	Code for electronic or optical compatibility.
139	1	Encoding	Code for serial encoding algorithm. (See SFF-8024 Transceiver Management)
140	1	Signaling rate, nominal	Nominal signaling rate, units of 100 MBd. For rate > 25.4 GBd, set this to FFh and use Byte 222.
141	1	Extended Rate Select Compliance	Tags for extended rate select compliance.
142	1	Length (SMF)	Link length supported at the signaling rate in byte 140 or page 00h byte 222, for SMF fiber in km *. A value of 1 shall be used for reaches from 0 to 1 km.
143	1	Length (OM3 50 um)	Link length supported at the signaling rate in byte 140 or page 00h byte 222, for EBW 50/125 um fiber (OM3), units of 2 m *
144	1	Length (OM2 50 um)	Link length supported at the signaling rate in byte 140 or page 00h byte 222, for 50/125 um fiber (OM2), units of 1 m *
145	1	Length (OM1 62.5 um) or Copper	Link length supported at the signaling rate in byte 140 or page 00h byte 222, for 62.5/125 um fiber (OM1), units of 1 m *, or copper cable attenuation in dB at 25.78 GHz.
		Cable Attenuation	
146	1	Length (passive copper or active cable or OM4 50 um)	Length of passive or active cable assembly (units of 1 m) or link length supported at the signaling rate in byte 140 or page 00h byte 222, for OM4 50/125 um fiber (units of 2 m) as indicated by Byte 147. See 6.3.12.
147	1	Device technology	Device technology
148-163	16	Vendor name	Free side device vendor name (ASCII)
164	1	Extended Module	Extended Module codes for InfiniBand.
165-167	3	Vendor OUI	Free side device vendor IEEE company ID.
168-183	16	Vendor PN	Part number provided by free side device vendor(ASCII)
184-185	2	Vendor rev	Revision level for part number provided by the vendor(ASCII)

186-187	2	Wavelength or Copper Cable Attenuation	Nominal laser wavelength (wavelength=value/20 in nm) or copper cable attenuation in dB at 2.5 GHz (Byte 186) and 5.0 GHz (Byte 187)
188-189	2	Wavelength tolerance or Copper Cable Attenuation	The range of laser wavelength (+/- value) from nominal wavelength. (wavelength Tol. =value/200 in nm) or copper cable attenuation in dB at 7.0 GHz (Byte 188) and 12.9 GHz (Byte 189)
190	1	Max case temp	Maximum case temperature
191	1	CC_BASE	Check code for base ID fields (Bytes 128-190)
192	1	Link codes	Extended Specification Compliance Codes (See SFF-8024)
193-195	3	Options	Optional features implemented.
196-211	16	Vendor SN	Serial number provided by vendor.(ASCII)
212-219	8	Date Code	Vendor's manufacturing date code.
220	1	Diagnostic Monitoring Type	Indicates which type of diagnostic monitoring is implemented (if any) in the free side device. Bit 1,0 Reserved.
221	1	Enhanced Options	Indicates which optional enhanced features are implemented in the free side device.
222	1	CC_EXT	Check code for the Extended ID Fields (Bytes 192-222)
224-255	32	Vendor Specific	Vendor Specific EEPROM

#### Page 02h (Optional)


128-255	128	User EEPROM Data	
---------	-----	------------------	--

#### Page 03h (Optional)

128-129	2	Temp High Alarm	MSB at lower byte address
130-131	2	Temp Low Alarm	MSB at lower byte address
132-133	2	Temp High Warning	MSB at lower byte address
134-135	2	Temp Low Warning	MSB at lower byte address
136-143	8	Reserved	Reserved
144-145	2	Vcc High Alarm	MSB at lower byte address
146-147	2	Vcc Low Alarm	MSB at lower byte address
148-149	2	Vcc High Warning	MSB at lower byte address
150-151	2	Vcc Low Warning	MSB at lower byte address
152-159	8	Reserved	Reserved
160-175	16	Vendor Specific	Vendor Specific
176-177	2	Rx Power High Alarm	MSB at lower byte address
178-179	2	Rx Power Low Alarm	MSB at lower byte address
180-181	2	Rx Power High Warning	MSB at lower byte address
182-183	2	Rx Power Low Warning	MSB at lower byte address
184-185	2	Tx Bias High Alarm	MSB at lower byte address
186-187	2	Tx Bias Low Alarm	MSB at lower byte address
188-189	2	Tx Bias High Warning	MSB at lower byte address
190-191	2	Tx Bias Low Warning	MSB at lower byte address
192-193	2	Tx Power High Alarm	MSB at lower byte address
194-195	2	Tx Power Low Alarm	MSB at lower byte address
196-197	2	Tx Power High Warning	MSB at lower byte address

198-199	2	Tx Power Low Warning	MSB at lower byte address
200-207	8	Reserved	Reserved thresholds for channel parameter set 4
208-215	8	Reserved	Reserved thresholds for channel parameter set 5
216-223	8	Vendor Specific	Vendor Specific
224	1	Tx EQ & Rx Emphasis Magnitude ID	Tx EQ & Rx Emphasis Magnitude ID
225	1	Rx output amplitude support indicators	Rx output amplitude support indicators
226-229	4	Control options advertising	Control options advertising
230-241	12	Optional Channel Controls	Optional Channel Controls
242-247	6	Channel Monitor Masks	Channel Monitor Masks
248-249	2	Reserved	Reserved channel monitor masks set 4
250-251	2	Reserved	Reserved channel monitor masks set 5
252-255	4	Reserved	Reserved


## Mechanical Dimension

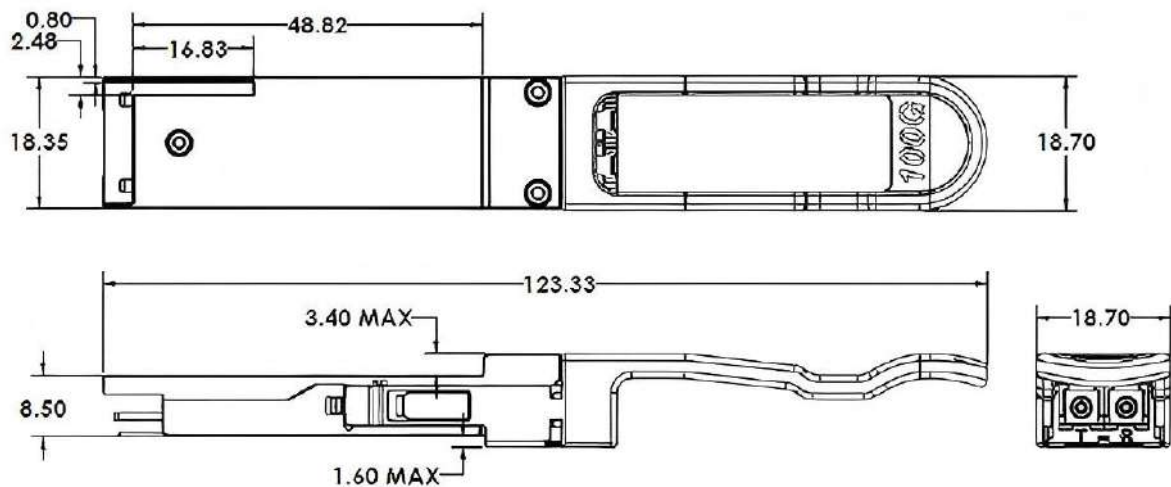

## Test Center

### 1. Performance Testing

Every fiber optic transceiver is thoroughly tested by the LSOLINK Assurance Program, which is equipped with the world's most advanced analytical equipment to ensure that our transceivers meet the industry's international public protocol standards while still functioning flawlessly in your facility.

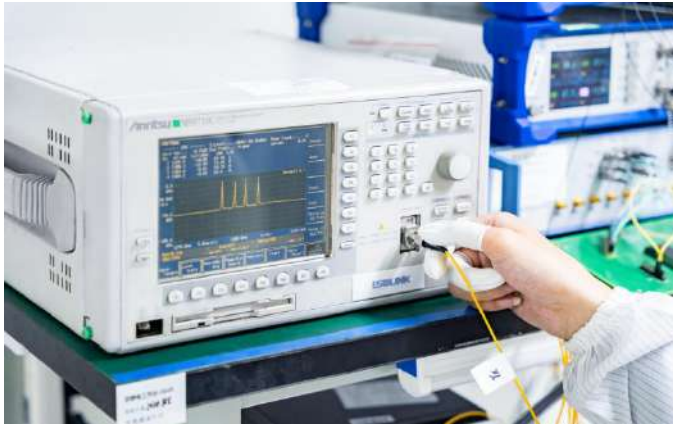

#### Optical Spectrum Inspection

Using the industry's leading optical spectrum analyser to check in real time that the parameters of the optical transceiver's laser comply with industry standards.

- **Peak:** Peak wavelength and peak level
- **2nd Peak:** Side-mode wavelength and level
- **Mean Wl:** Center wavelength
- **Total Power:** Total power of spectrum
- **SMSR:** Side-Mode Suppression Ratio



#### Optical Signal Quality Inspection

Using highly efficient sampling oscilloscopes and BERT testers, equipped with an automated test platform to accurately test the signal quality of the transceiver, test records are kept for up to 5 years to ensure the traceability of each transceiver.

- **Eye Mask Margin(NRZ)**
- **TDECQ(PAM4):**transmitter dispersion eye closure
- **OMA:** Optical modulation amplitude
- **BER:** Bit error rate
- **ER:** Extinction Ratio



#### Flow Pressure Test

Using multi-protocol network traffic analyser with various brands of switches to test the transceiver's ability to transmit at full speed.

- **Bandwidth:** Actual transceiver bandwidth on the port
- **Packet Loss**
- **Packet Errors:**CRC Errors/PCS Errors/Symbol Errors
- **LinkDown Counts**
- **latency**

Above is part of our test bed network equipment. For more information, Please click [download](#) for optical transceiver performance test report.



## 2. Quality Control

We adopt advanced quality management solutions. Each transceiver is self-inspected, including: 20x microscope inspection, 200x microscope inspection, and QC process inspection.



**visual inspection**



**Microscopic inspection: 20X**



**Microscopic inspection: 200X**



**Reliability Verification**



**Optical endface inspection**



**OQC Inspection**

## Order Information


Part Number	Description
NDR-OSFP-SR4	400GBASE-SR4 OSFP NDR PAM4 850nm 50m DOM MTP/MPO-12 APC MMF Transceiver Module, Flat Top
NDR-OSFP-DR4	400GBASE-DR4 OSFP NDR PAM4 1310nm 100m DOM MTP/MPO-12 APC SMF Transceiver Module, Flat Top
NDR-OSFP-2SR4	800GBASE-2xSR4 OSFP NDR PAM4 850nm 50m DOM Dual MTP/MPO-12 APC MMF Transceiver Module, Finned Top
NDR-OSFP-2SR4-R	800GBASE-2xSR4 OSFP NDR PAM4 850nm 50m DOM Dual MTP/MPO-12 APC MMF Transceiver Module, Flat Top
NDR-OSFP-2DR4	800GBASE-2xDR4 OSFP NDR PAM4 1310nm 100m DOM Dual MTP/MPO-12 APC SMF Transceiver Module, Finned Top
NDR-OSFP-2DR4+	800GBASE-2xDR4 OSFP NDR PAM4 1310nm 500m DOM Dual MTP/MPO-12 APC SMF Transceiver Module, Finned Top
NDR-OSFP-2FR4	800GBASE-2xFR4 OSFP NDR PAM4 1310nm 2km DOM Dual LC SMF Transceiver Module, Finned Top
NDR-Q112-SR4	400GBASE-SR4 QSFP112 NDR PAM4 850nm 50m DOM MTP/MPO-12 APC MMF Transceiver Module
NDR-Q112-DR4	400GBASE-DR4 QSFP112 NDR PAM4 1310nm 100m DOM MTP/MPO-12 APC SMF Transceiver Module
HDR-Q56-SR4	200GBASE-SR4 QSFP56 HDR 850nm 100m DOM MTP/MPO-12 UPC MMF Transceiver Module
HDR-Q56-FR4	200GBASE-FR4 QSFP56 HDR 1310nm 2km DOM LC SMF Transceiver Module
EDR-Q28-SR4	100GBASE-SR4 QSFP28 EDR 850nm 100m DOM MTP/MPO-12 UPC MMF Transceiver Module
EDR-Q28-CWDM4	100GBASE-CWDM4 QSFP28 EDR 1310nm 2km DOM LC SMF Transceiver Module



## Further Information

 | Lighting the Path to Global Links

 **Web** | [www.lsolink.com](http://www.lsolink.com)

 **Email** | For [Sales@lsolink.com](mailto:Sales@lsolink.com)

## Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. LSOLINK assumes no responsibility for the use or reliability of equipment or software not provided by LSOLINK. Copyright LSOLINK.COM All Rights