

# Product Specification

OC-12/STM-4 ZX SFP 1550nm 80km  
SONET/SDH Optical Transceiver

P/N: OC12-SFP-ZX



## Features

- Hot Pluggable SFP form factor
- Up to 622M b/s Data
- Single +3.3V power supply
- Duplex LC connector
- Max power dissipation <1.0W
- Up to 80km on 9/125μm SMF
- 1550nm DFB Laser Transmitter
- PIN receivers
- Built-in digital diagnostic function
- Commercial temperature range 0°C to 70°C

## Compliance

- SFP MSA
- Compliant to SFP+ Electrical MSA SFF-8431
- Compliant to SFP+ Mechanical MSA SFF-8432
- SFF-8472
- IEEE 802.3ae
- RoHS

## Applications

- Other Optical Links
- Switch to Switch Interface
- Fast Ethernet
- Switched Backplane Applications
- Router/Server Interface

## Description

The OC12-SFP-ZX is a high-performance 622Mbps Small Form Factor Pluggable (SFP) transceiver designed for long-distance communication up to 80 kilometers over 9/125μm single-mode fiber. Fully compliant with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA), this module integrates advanced components, including a DFB laser, PIN photo-detector, LD driver, limiting amplifier, and a digital diagnostic monitor, ensuring reliable and efficient operation in SONET/SDH networks.

The OC12-SFP-ZX offers robust control and monitoring capabilities. The optical output can be disabled via a TTL logic high-level input on Tx Disable or through I2C interface control. It provides Tx Fault indication to alert users of laser degradation and Loss of Signal (LOS) output to detect the absence of an input optical signal or link status with a partner. These features ensure enhanced system diagnostics and network reliability.

Equipped with Digital Diagnostic Monitoring (DDM) via I2C, the OC12-SFP-ZX allows real-time access to critical parameters such as LOS (or Link), Disable, and Fault status. This transceiver is ideal for OC-12/STM-4 applications, delivering high-speed, long-haul connectivity with exceptional signal integrity. Its compact design and advanced functionality make it a versatile solution for telecommunications and enterprise networks requiring extended reach and precise performance monitoring.

## Product performance Specifications

### 1. Basic Product Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit	Note
Storage Temperature	T <sub>s</sub>	-40	-	+85	°C	
Supply Voltage	V <sub>CC</sub>	-0.3	-	3.6	V	
Relative Humidity	RH	5	-	95	%	
Operating Case Temperature	T <sub>c</sub>	0	-	70	°C	
Power Supply Voltage	V <sub>CC</sub>	3.0	3.30	3.465	V	
Damage Threshold	THd	5			dBm	
Data Rate		-	622		Mb/s	
Control Input Voltage High		2		V <sub>CC</sub>	V	
Control Input Voltage Low		0		0.8	V	
Link Distance (SMF)	D			80	km	9/125um
Power Consumption	P			1.0	W	
Supply Current	I <sub>CC</sub>			280	mA	

## 2. Product Optical and Electrical Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit	Note
Transmitter						
Differential Input Impedance	R <sub>in</sub>	90	100	110	Ohm	
Differential Input Voltage Swing	V <sub>inPP</sub>	200		2400	mVp-p	
Single-ended Input Voltage Tolerance	V <sub>CC</sub>	-0.3		4.0	V	
Transmit Disable Assert Time				5	us	
Transmit Disable Voltage	V <sub>dis</sub>	V <sub>CC</sub> -1.3		V <sub>CC</sub>	V	
Transmit Enable Voltage	V <sub>en</sub>	V <sub>CC</sub> -0.3		0.8	V	
Transmit Disable Assert Time	T <sub>dassert</sub>			10	us	
Center Wavelength	λ <sub>c</sub>	1530	1550	1570	nm	
Spectral Width	σ			1	nm	
Average Optical Power	P <sub>AVG</sub>	-3		2	dBm	1
Extinction Ratio	ER	8.2			dB	
Side Mode Suppression Ratio	SMSR	30			dB	
Transmitter OFF Output Power	P <sub>OFF</sub>			-45	dBm	
Transmitter Eye Mask	Compliant with G.957(class 1 laser safety)					
Receiver						
Differential Output Voltage Swing	V <sub>out,pp</sub>	500		900	mVpp	
Differential Output Impedance	Z <sub>out</sub>	90	100	110	Ohm	
Data output rise/fall time	Tr/Tf		100		ps	20% to 80%
LOS Assert Voltage	V <sub>losH</sub>	V <sub>CC</sub> -1.3		V <sub>CC</sub>	V	
LOS Assert Voltage	V <sub>losL</sub>	V <sub>CC</sub> -0.3		0.8	V	
Center Wavelength	λ <sub>c</sub>	1270		1610	nm	
Receiver Sensitivity (Average Power)	Sen			-28	dBm	2
Input Saturation Power (overload)	P <sub>sat</sub>	-8			dBm	
LOS Assert	LOSA	-36			dB	3
LOS De-assert	LOSD			-29	dBm	3

LOS Hysteresis	LOSH	0.5	2	6	dBm	
General Specifications						
Data Rate	BR		622		Mb/s	
Bit Error Rate	BER			$10^{-12}$		
Max. Supported Link Length on 50/125µm MMF@155Mb/s	L <sub>MAX</sub>		80		km	
Total System Budget	LB	20			dB	

**Note1:** Measure at 2<sup>23</sup>-1 NRZ PRBS pattern.

**Note2:** Measured with Light source 1550nm, ER=8.2dB; BER =< 10<sup>-12</sup> @PRBS=223-1 NRZ.

**Note3:** When LOS de-asserted, the RX data+/- output is High-level (fixed).

## Recommended Host Board Power Supply Circuit

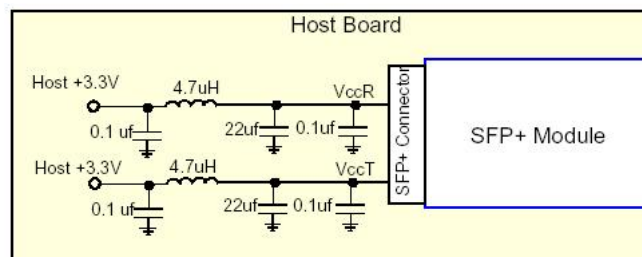


Figure 1: Recommended Host Board Power Supply Circuit

## Recommended Interface Circuit

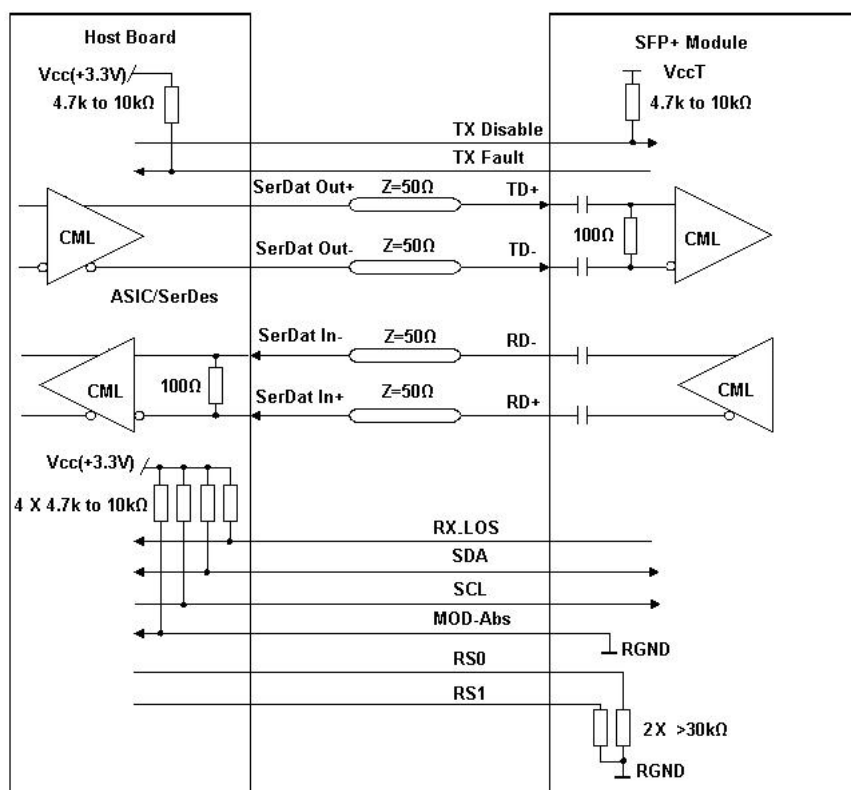


Figure 2: Recommended Interface Circuit

## Pin-out Definition

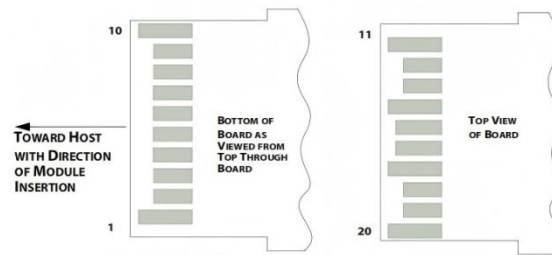


Figure3:Pin view

## Pin Function Definitions

Pin	Logic	Symbol	Description	Note
1		VeeT	Module Transmitter Ground	1
2	LVTTL-O	TX_Fault	Module Transmitter Fault	2
3	LVTTL-I	TX_Disable	Transmitter Disable; Turns off transmitter laser output	3
4	LVTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 as defined in the INF-8074i)	4
5	LVTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 as defined in the INF-8074i)	4
6		MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	5
7	LVTTL-I	RS0	Adaptive multi-rate operation	6
8	LVTTL-O	RX_LOS	Receiver Loss of Signal Indication (In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect)	2
9	LVTTL-I	RS1	Adaptive multi-rate operation	6
10		VeeR	Module Receiver Ground	1
11		VeeR	Module Receiver Ground	1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Non-Inverted Data Output	
14		VeeR	Module Receiver Ground	1
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Transmitter 3.3 V Supply	
17		VeeT	Module Transmitter Ground	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	1

**Note1:** The module signal ground pins, VeeR and VeeT, shall be isolated from the module case.

**Note2:** This pin is an open collector/drain output pin and shall be pulled up with 4.7kΩ-10kΩ to Host\_Vcc on the host board. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module VccT/R + 0.5V.


**Note3:** This pin is an open collector/drain input pin and shall be pulled up with 4.7kΩ-10kΩ to VccT in the module.

**Note4:** See SFF-8431 4.2 2-wire Electrical Specifications.

**Note5:** This pin shall be pulled up with 4.7kΩ-10kΩ to Host\_Vcc on the host board.

**Note6:** Connect with 30kΩ load pulled down to GND in the module.

## Monitoring Specification

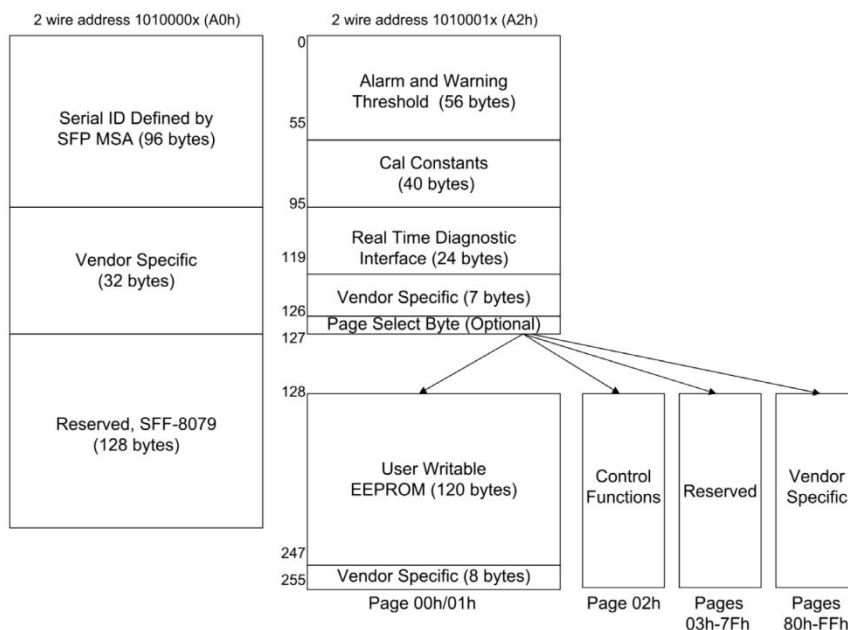

**Figure4:**Memory map

## Memory map Table

A0h	Bytes	Name	Description
<b>A0h ID Fields</b>			
0	1	Identifier	Type of transceiver
1	1	Ext. Identifier	Extended identifier of type of transceiver
2	1	Connector	Code for connector type
3-10	8	Transceiver	Code for electronic or optical compatibility
11	1	Encoding	Code for high speed serial encoding algorithm
12	1	Signaling Rate, Nominal	Nominal signaling rate, units of 100 MBd.
13	1	Rate Identifier	Type of rate select functionality
14	1	Length (SMF,km) or Copper Cable	Link length supported for single-mode fiber, units of km, or copper


		Attenuation	cable attenuation in dB at 12.9 GHz
15	1	Length (SMF) or Copper Cable Attenuation	Link length supported for single-mode fiber, units of 100 m, or copper cable attenuation in dB at 25.78 GHz
16	1	Length (50 um, OM2)	Link length supported for 50 um OM2 fiber, units of 10 m
17	1	Length (62.5 um, OM1)	Link length supported for 62.5 um OM1 fiber, units of 10 m
18	1	Length (OM4 or copper cable)	Link length supported for 50um OM4 fiber, units of 10 m. Alternatively, copper or direct attach cable, units of m
19	1	Length (OM3) or Cable length, additional	Link length supported for 50 um OM3 fiber, units of 10 m. Alternatively, copper or direct attach cable multiplier and base value
20-35	16	Vendor name	SFP vendor name (ASCII)
36	1	Transceiver	Code for electronic or optical compatibility
37-39	3	Vendor OUI	SFP vendor IEEE company ID
40-55	16	Vendor PN	Part number provided by SFP vendor (ASCII)
56-59	4	Vendor rev	Revision level for part number provided by vendor (ASCII)
60-61	2	Wavelength	Laser wavelength (Passive/Active Cable Specification Compliance)
62	1	Fibre Channel Speed 2	Transceiver's Fibre Channel speed capabilities
63	1	CC_BASE	Check code for Base ID Fields (addresses 0 to 62)
64-65	2	Options	Indicates which optional transceiver signals are implemented
66	1	Signaling Rate, max	Upper signaling rate margin, units of %
67	1	Signaling Rate, min	Lower signaling rate margin, units of %
68-83	16	Vendor SN	Serial number provided by vendor (ASCII)
84-91	8	Date code	Vendor's manufacturing date code
92	1	Diagnostic Monitoring Type	Indicates which type of diagnostic monitoring is implemented (if any) in the transceiver
93	1	Enhanced Options	Indicates which optional enhanced features are implemented (if any) in the transceiver
94	1	SFF-8472 Compliance	Indicates which revision of SFF-8472 the transceiver complies with.
95	1	CC_EXT	Check code for the Extended ID Fields (addresses 64 to 94)
96-127	32	Vendor Specific	Vendor Specific EEPROM
128-255	128	Reserved	Reserved (was assigned to SFF-8079)
<b>A2h ID Fields</b>			
00-01	2	Temp High Alarm	MSB at low address
02-03	2	Temp Low Alarm	MSB at low address
04-05	2	Temp High Warning	MSB at low address
06-07	2	Temp Low Warning	MSB at low address
08-09	2	Voltage High Alarm	MSB at low address
10-11	2	Voltage Low Alarm	MSB at low address
12-13	2	Voltage High Warning	MSB at low address
14-15	2	Voltage Low Warning	MSB at low address



16-17	2	Bias High Alarm	MSB at low address
18-19	2	Bias Low Alarm	MSB at low address
20-21	2	Bias High Warning	MSB at low address
22-23	2	Bias Low Warning	MSB at low address
24-25	2	TX Power High Alarm	MSB at low address
26-27	2	TX Power Low Alarm	MSB at low address
28-29	2	TX Power High Warning	MSB at low address
30-31	2	TX Power Low Warning	MSB at low address
32-33	2	RX Power High Alarm	MSB at low address
34-35	2	RX Power Low Alarm	MSB at low address
36-37	2	RX Power High Warning	MSB at low address
38-39	2	RX Power Low Warning	MSB at low address
40-41	2	Optional Laser Temp High Alarm	MSB at low address
42-43	2	Optional Laser Temp Low Alarm	MSB at low address
44-45	2	Optional Laser Temp High Warning	MSB at low address
46-47	2	Optional Laser Temp Low Warning	MSB at low address
48-49	2	Optional TEC Current High Alarm	MSB at low address
50-51	2	Optional TEC Current Low Alarm	MSB at low address
52-53	2	Optional TEC Current High Warning	MSB at low address
54-55	2	Optional TEC Current Low Warning	MSB at low address
56-91	36	Ext Cal Constants or Additional Enhanced Features	Diagnostic calibration constants for optional External Calibration if External Calibration bit, A0h, byte 92, bit 4 is 1 Additional Enhanced Features advertisement, control and status if External Calibration bit, A0h, byte 92, bit 4 is 0
92-94	3	Reserved	
95	1	CC_DMI	Check code for Base Diagnostic Fields (addresses 0 to 94)
96-105	10	Diagnostics	Diagnostic Monitor Data (internally or externally calibrated)
106-109	4	Optional Diagnostics	Monitor Data for Optional Laser temperature and TEC current
110	1	Status/Control	Optional Status and Control Bits
111	1	Reserved	Reserved (was assigned to SFF-8079)
112-113	2	Alarm Flags	Diagnostic Alarm Flag Status Bits
114	1	Tx Input EQ control	Tx Input equalization level control
115	1	Rx Out Emphasis control	Rx Output emphasis level control
116-117	2	Warning Flags	Diagnostic Warning Flag Status Bits
118-119	2	Ext Status/Control	Extended module control and status bytes
120-126	7	Vendor Specific	Vendor specific memory addresses
127	1	Table Select	Optional Page Select

128-247	120	User EEPROM	User writable non-volatile memory
248-255	8	Vendor Control	Vendor specific control addresses
A2h Page 02h			
128-129	2	Reserved	Reserved for SFF-8690 (Tunable Transmitter)
130	1	Reserved	Reserved for future receiver controls
131	1	Rx Decision Threshold	RDT value setting
132-172	41	Reserved	Reserved for SFF-8690
173-255	83	Reserved	Reserved

## Mechanical Dimension

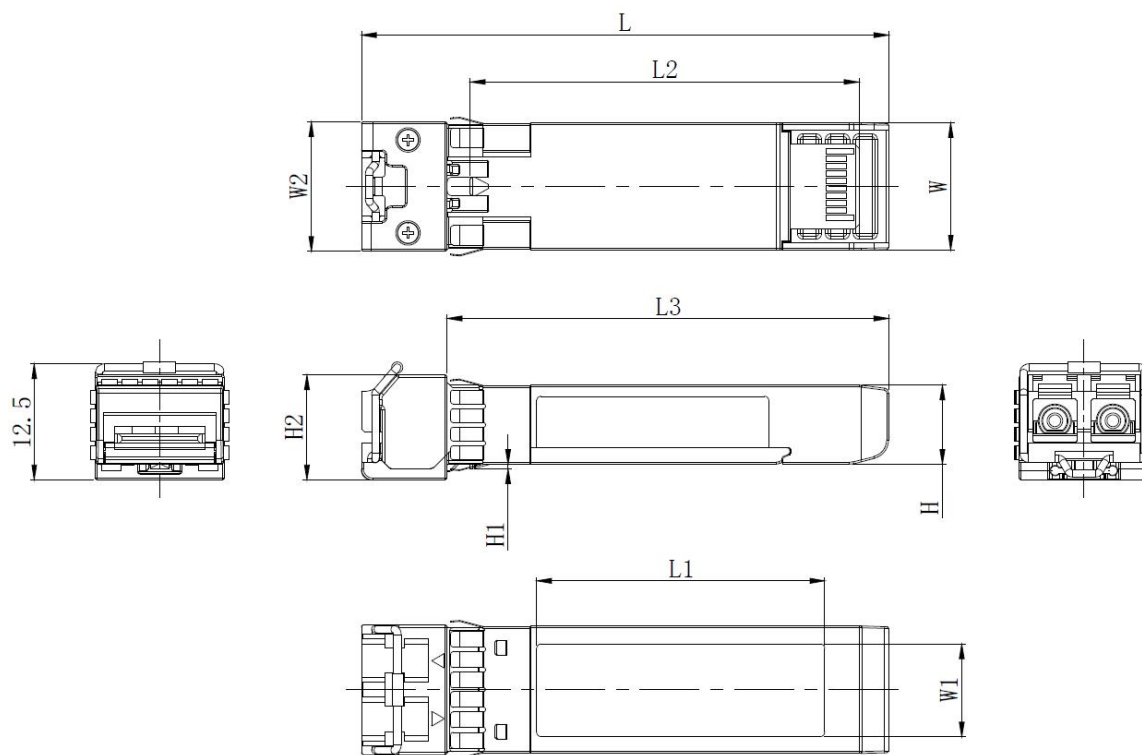


Unit: mm

	L	L1	L2	L3	W	W1	W2	H	H1	H2
MAX	56.9	31.2	41.95	47.7	13.8	10.2	14.0	8.6	0.6	11.5
Typical	56.7	31.0	41.80	47.5	13.7	10.0	—	8.5	0.5	11.3
MIN	56.5	30.8	41.65	47.3	13.5	9.8	—	8.4	0.4	11.1

## Test Center

### 1. Performance Testing

Every fiber optic transceiver is thoroughly tested by the LSOLINK Assurance Program, which is equipped with the world's most advanced analytical equipment to ensure that our transceivers meet the industry's international public protocol standards while still functioning flawlessly in your facility.

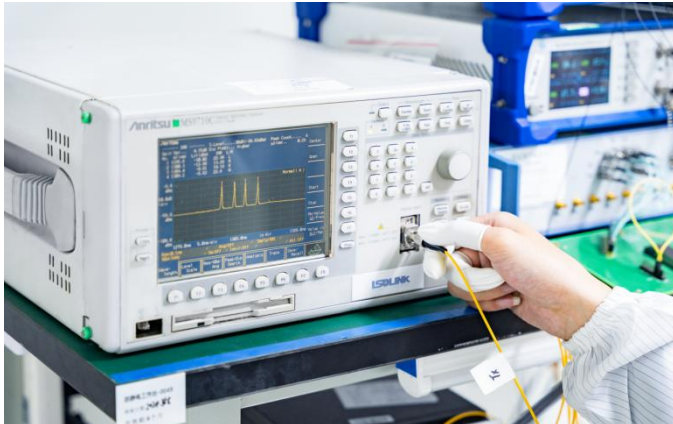

#### Optical Spectrum Inspection

Using the industry's leading optical spectrum analyser to check in real time that the parameters of the optical transceiver's laser comply with industry standards.

- **Peak:** Peak wavelength and peak level
- **2nd Peak:** Side-mode wavelength and level
- **Mean Wl:** Center wavelength
- **Total Power:** Total power of spectrum
- **SMSR:** Side-Mode Suppression Ratio



#### Optical Signal Quality Inspection

Using highly efficient sampling oscilloscopes and BERT testers, equipped with an automated test platform to accurately test the signal quality of the transceiver, test records are kept for up to 5 years to ensure the traceability of each transceiver.

- **Eye Mask Margin(NRZ)**
- **TDECQ(PAM4):**transmitter dispersion eye closure
- **OMA:** Optical modulation amplitude
- **BER:** Bit error rate
- **ER:** Extinction Ratio



#### Flow Pressure Test

Using multi-protocol network traffic analyser with various brands of switches to test the transceiver's ability to transmit at full speed.

- **Bandwidth:** Actual transceiver bandwidth on the port
- **Packet Loss**
- **Packet Errors:**CRC Errors/PCS Errors/Symbol Errors
- **LinkDown Counts**
- **latency**

Above is part of our test bed network equipment. For more information, Please click [download](#) for optical transceiver performance test report.



## 2. Quality Control

We adopt advanced quality management solutions. Each transceiver is self-inspected, including: 20x microscope inspection, 200x microscope inspection, and QC process inspection.



**visual inspection**



**Microscopic inspection: 20X**



**Microscopic inspection: 200X**



**Reliability Verification**



**Optical endface inspection**



**OQC Inspection**


## Order Information

Part Number	Description
OC3-SFP-SX	155BASE-SX SFP OC-3/STM-1 SONET/SDH 1310nm 2km DOM LC MMF SONET/SDH Transceiver Module
OC3-SFP-LX	155BASE-LX SFP OC-3/STM-1 SONET/SDH 1310nm 20km DOM LC SMF SONET/SDH Transceiver Module
OC3-SFP-EX	155BASE-EX SFP OC-3/STM-1 SONET/SDH 1550nm 40km DOM LC SMF SONET/SDH Transceiver Module
OC3-SFP-ZX	155BASE-ZX SFP OC-3/STM-1 SONET/SDH 1550nm 80km DOM LC SMF SONET/SDH Transceiver Module
OC12-SFP-SX	622BASE-SX SFP OC-12/STM-4 SONET/SDH 850nm 500m DOM LC MMF SONET/SDH Transceiver Module
OC12-SFP-LX	622BASE-LX SFP OC-12/STM-4 SONET/SDH 1310nm 15km DOM LC SMF SONET/SDH Transceiver Module
OC12-SFP-EX	622BASE-EX SFP OC-12/STM-4 SONET/SDH 1550nm 40km DOM LC SMF SONET/SDH Transceiver Module
OC12-SFP-ZX	622BASE-ZX SFP OC-12/STM-4 SONET/SDH 1550nm 80km DOM LC SMF SONET/SDH Transceiver Module
OC48-SFP-SX	2.5GBASE-SX SFP OC-48/STM-16 SONET/SDH 850nm 500m DOM LC MMF SONET/SDH Transceiver Module
OC48-SFP-LX	2.5GBASE-LX SFP OC-48/STM-16 SONET/SDH 1310nm 15km DOM LC SMF SONET/SDH Transceiver Module
OC48-SFP-EX	2.5GBASE-EX SFP OC-48/STM-16 SONET/SDH 1550nm 40km DOM LC SMF SONET/SDH Transceiver Module
OC48-SFP-ZX	2.5GBASE-ZX SFP OC-48/STM-16 SONET/SDH 1550nm 80km DOM LC SMF SONET/SDH Transceiver Module

## Further Information

 | Lighting the Path to Global Links

 **Web** | [www.lsolink.com](http://www.lsolink.com)

 **Email** | For [Sales@lsolink.com](mailto:Sales@lsolink.com)

## Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. LSOLINK assumes no responsibility for the use or reliability of equipment or software not provided by LSOLINK. Copyright LSOLINK.COM All Rights