

Product Specification

10.3125Gb/s CWDM SFP 1470nm~1610nm
120km Optical Transceiver

P/N: 1G-SFP-C120-xx



Features

- Hot Pluggable SFP form factor
- Operating data rate 1.25Gbps
- Single +3.3V power supply
- Duplex LC-UPC connector
- Max power dissipation <1.0W
- Up to 120km on 9/125μm SMF
- 18-Wavelength CWDM 1470nm-1610nm Available
- CWDM DFB laser transmitter
- PIN receivers
- Built-in digital diagnostic function
- Commercial temperature range 0°C to 70°C

Compliance

- SFP MSA
- Compliant with SFP Electrical MSA SFF-8431
- Compliant with SFP Mechanical MSA SFF-8432
- SFF-8472
- IEEE 802.3ae
- RoHS

Applications

- Switches with SFP ports
- Router with SFP Ports
- Server or Network Adapter Card
- Optical Transmission System
- Other devices with SFP Ports
- CWDM Networks

Description

The 1G-SFP-C120 is a high-performance SFP transceiver designed to support up to 120km link lengths over single-mode fiber (SMF) via an LC duplex connector. This versatile module is fully compatible with a range of networking devices, including Cisco switches, routers, servers, and network interface cards (NICs), and is individually tested for reliability and performance.

Featuring low power consumption and CWDM technology, the 1G-SFP-C120-xx efficiently saves fiber resources by combining multiple optical signals of different wavelengths through an external WDM and transmitting them over a single fiber. This makes it an ideal solution for Internet Service Providers (ISPs) looking to optimize bandwidth, as well as for Gigabit Ethernet communication links, Enterprise LAN & SAN Networks, Data Center LAN & SAN Networks, and other optical link applications.

Hot-swappable and highly reliable, the 1G-SFP-C120 transceiver provides an excellent balance of performance, cost-effectiveness, and energy efficiency for long-distance optical communications.

Product performance Specifications

1. Basic Product Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit
Storage Temperature	T _s	-40	-	+85	°C
Supply Voltage	V _{CC}	-0.5	-	4	V
Relative Humidity	RH	0	-	85	%
Operating Case Temperature	T _c	0	-	70	°C
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V
Power Supply Current	I _{CC}			250	mA
Power Dissipation	PD	-	-	1000	mW
Data Rate	DR	-	1.25	-	Gbps
Max. Supported Link Length on 9/125μm SMF@1.25Gb/s	-	120	-		km
Total System Budget	-	19	-		dB

2. Product Optical and Electrical Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit
Transmitter					
Center Wavelength	λ_c	$\lambda-6.5$	λ	$\lambda+6.5$	nm
RMS Spectral Width	σ			1	nm
Side Mode Suppression Ratio	SMSR	30			dB
Optical Output Power ₁	P _{out}	-5		0	dBm
Optical Rise/Fall Time ₂	t _r / t _f			260	ps
Extinction Ratio	ER	9			dB
Generated Jitter (peak to peak) ₃	JTXp-p			0.07	UI
Generated Jitter (rms) ₃	JTXrms			0.007	UI
Input differential impedance ₄	R _{in}	90	100	110	w
Optical Eye Mask	Compliant with IEEE 802.3ae				
Single ended data input Swing	V _{in} PP	250		1200	mVp-p
Transmit Disable Voltage ₅	VD	V _{CC} – 1.3		V _{CC} – 1.3	V
Transmit Enable Voltage	VEN	V _{EE}		VERR+ 0.8	V
Transmit Disable Assert Time	T _{dessert}			10	us
Receiver					
Optical Input Wavelength	λ_r	1260		1620	nm
Overload ₆	P _{in}	-1			dBm
RX Sensitivity ₆	Sen			-24	dB
RX_LOS Assert	LOS A	-40			dBm
RX_LOS De-assert	LOS D			-25	dBm
RS0 and RS1	LOS H	0.5			dB
Single ended data output Swing ₇	V _{out,pp}	300		800	mv
Data output rise time ₈	t _r			260	ps
Data output fall time					
LOS Fault ₉	V _{losfault}	V _{CC} – 0.5		V _{CC_host}	V
LOS Normal ₉	V _{los norm}	V _{EE}		V _{EE} +0.5	V
Power Supply Rejection ₁₀	PSR	100			mVpp

Note1: The optical power is launched into SMF

Note2: 20-80%.

Note3: Jitter measurements taken using Agilent OMNIBERT 718 in accordance with GR-253

Note4: AC couple

Note5: Or open circuit

Note6: Measured with PRBS 27 -1 at 10-12 BER

Note7: Into 100 ohm differential termination

Note8: 20 – 80 %

Note9: LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

Note10: All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000

Recommended Host Board Power Supply Circuit

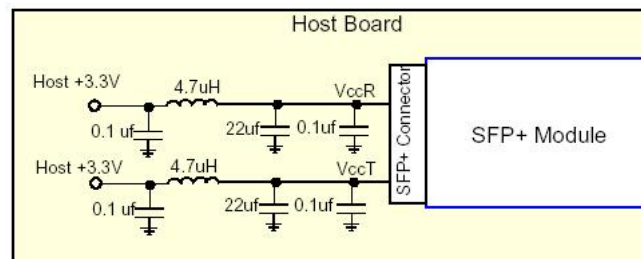


Figure 1: Recommended Host Board Power Supply Circuit

Recommended Interface Circuit

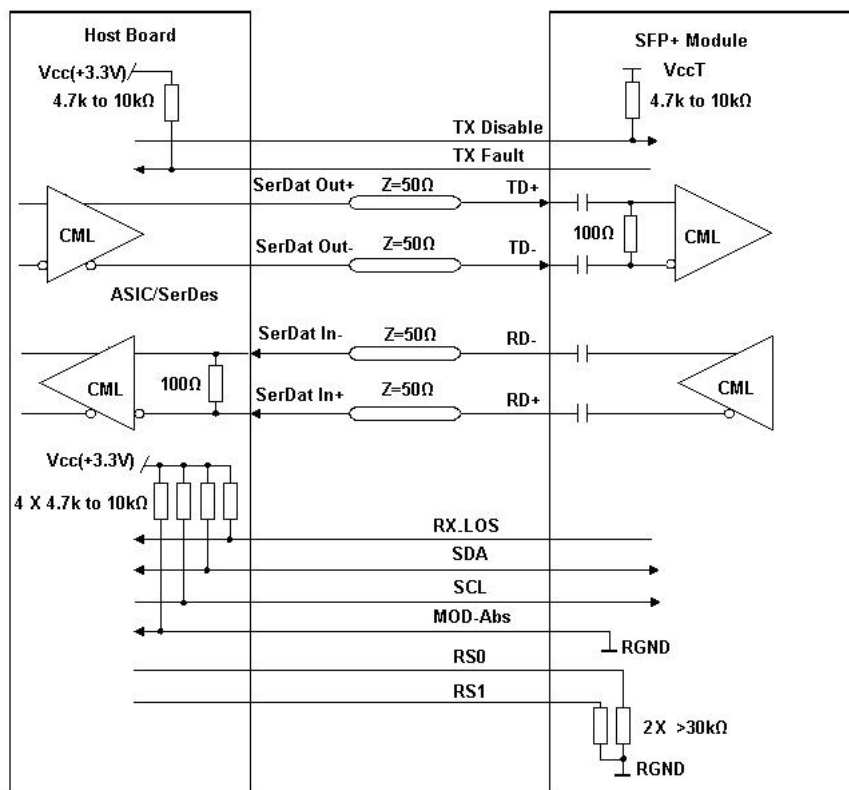


Figure 2: Recommended Interface Circuit

Pin-out Definition

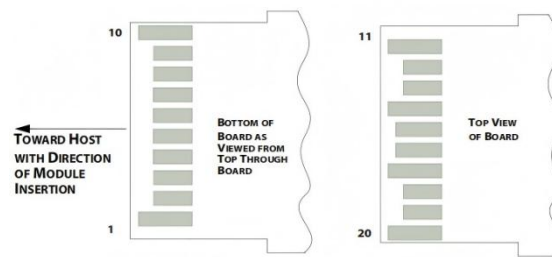


Figure3:Pin view

Pin Function Definitions

Pin	Logic	Symbol	Description	Note
1		VeeT	Module Transmitter Ground	1
2	LVTTL-O	TX_Fault	Module Transmitter Fault	2
3	LVTTL-I	TX_Disable	Transmitter Disable; Turns off transmitter laser output	3
4	LVTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 as defined in the INF-8074i)	4
5	LVTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 as defined in the INF-8074i)	4
6		MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	5
7	LVTTL-I	RS0	Adaptive multi-rate operation	6
8	LVTTL-O	RX_LOS	Receiver Loss of Signal Indication (In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect)	2
9	LVTTL-I	RS1	Adaptive multi-rate operation	6
10		VeeR	Module Receiver Ground	1
11		VeeR	Module Receiver Ground	1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Non-Inverted Data Output	
14		VeeR	Module Receiver Ground	1
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Transmitter 3.3 V Supply	
17		VeeT	Module Transmitter Ground	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	1

Note1: The module signal ground pins, VeeR and VeeT, shall be isolated from the module case.

Note2: This pin is an open collector/drain output pin and shall be pulled up with 4.7k Ω -10k Ω to Host_Vcc on the host board. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module VccT/R + 0.5V.

Note3: This pin is an open collector/drain input pin and shall be pulled up with 4.7k Ω -10k Ω to VccT in the module.

Note4: See SFF-8431 4.2 2-wire Electrical Specifications.

Note5: This pin shall be pulled up with 4.7k Ω -10k Ω to Host_Vcc on the host board.

Note6: Connect with 30k Ω load pulled down to GND in the module.

Monitoring Specification

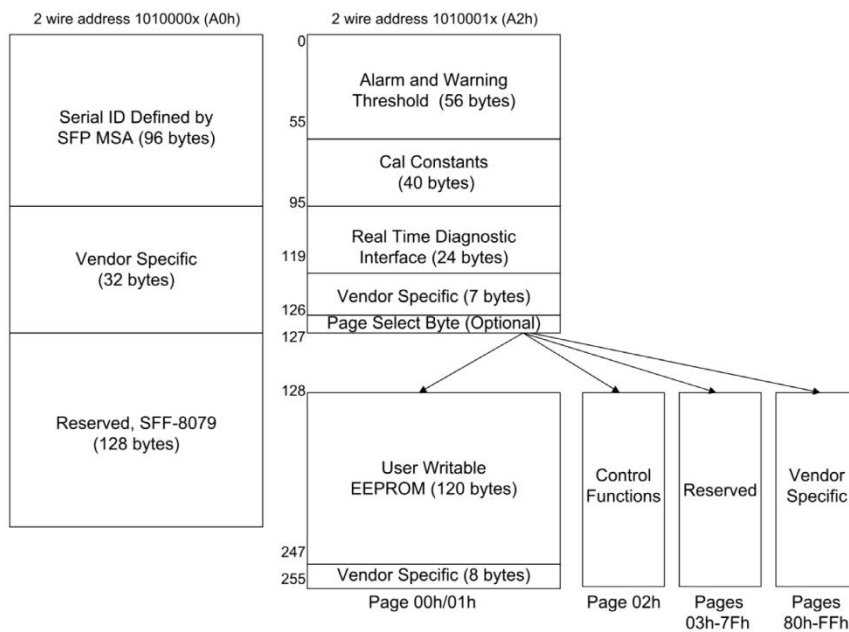


Figure4:Memory map

Memory map Table


A0h	Bytes	Name	Description
A0h ID Fields			
0	1	Identifier	Type of transceiver
1	1	Ext. Identifier	Extended identifier of type of transceiver
2	1	Connector	Code for connector type
3-10	8	Transceiver	Code for electronic or optical compatibility
11	1	Encoding	Code for high speed serial encoding algorithm
12	1	Signaling Rate, Nominal	Nominal signaling rate, units of 100 MBd.
13	1	Rate Identifier	Type of rate select functionality
14	1	Length (SMF,km) or Copper Cable	Link length supported for single-mode fiber, units of km, or copper

		Attenuation	cable attenuation in dB at 12.9 GHz
15	1	Length (SMF) or Copper Cable Attenuation	Link length supported for single-mode fiber, units of 100 m, or copper cable attenuation in dB at 25.78 GHz
16	1	Length (50 um, OM2)	Link length supported for 50 um OM2 fiber, units of 10 m
17	1	Length (62.5 um, OM1)	Link length supported for 62.5 um OM1 fiber, units of 10 m
18	1	Length (OM4 or copper cable)	Link length supported for 50um OM4 fiber, units of 10 m. Alternatively, copper or direct attach cable, units of m
19	1	Length (OM3) or Cable length, additional	Link length supported for 50 um OM3 fiber, units of 10 m. Alternatively, copper or direct attach cable multiplier and base value
20-35	16	Vendor name	SFP vendor name (ASCII)
36	1	Transceiver	Code for electronic or optical compatibility
37-39	3	Vendor OUI	SFP vendor IEEE company ID
40-55	16	Vendor PN	Part number provided by SFP vendor (ASCII)
56-59	4	Vendor rev	Revision level for part number provided by vendor (ASCII)
60-61	2	Wavelength	Laser wavelength (Passive/Active Cable Specification Compliance)
62	1	Fibre Channel Speed 2	Transceiver's Fibre Channel speed capabilities
63	1	CC_BASE	Check code for Base ID Fields (addresses 0 to 62)
64-65	2	Options	Indicates which optional transceiver signals are implemented
66	1	Signaling Rate, max	Upper signaling rate margin, units of %
67	1	Signaling Rate, min	Lower signaling rate margin, units of %
68-83	16	Vendor SN	Serial number provided by vendor (ASCII)
84-91	8	Date code	Vendor's manufacturing date code
92	1	Diagnostic Monitoring Type	Indicates which type of diagnostic monitoring is implemented (if any) in the transceiver
93	1	Enhanced Options	Indicates which optional enhanced features are implemented (if any) in the transceiver
94	1	SFF-8472 Compliance	Indicates which revision of SFF-8472 the transceiver complies with.
95	1	CC_EXT	Check code for the Extended ID Fields (addresses 64 to 94)
96-127	32	Vendor Specific	Vendor Specific EEPROM
128-255	128	Reserved	Reserved (was assigned to SFF-8079)
A2h ID Fields			
00-01	2	Temp High Alarm	MSB at low address
02-03	2	Temp Low Alarm	MSB at low address
04-05	2	Temp High Warning	MSB at low address
06-07	2	Temp Low Warning	MSB at low address
08-09	2	Voltage High Alarm	MSB at low address
10-11	2	Voltage Low Alarm	MSB at low address
12-13	2	Voltage High Warning	MSB at low address
14-15	2	Voltage Low Warning	MSB at low address

16-17	2	Bias High Alarm	MSB at low address
18-19	2	Bias Low Alarm	MSB at low address
20-21	2	Bias High Warning	MSB at low address
22-23	2	Bias Low Warning	MSB at low address
24-25	2	TX Power High Alarm	MSB at low address
26-27	2	TX Power Low Alarm	MSB at low address
28-29	2	TX Power High Warning	MSB at low address
30-31	2	TX Power Low Warning	MSB at low address
32-33	2	RX Power High Alarm	MSB at low address
34-35	2	RX Power Low Alarm	MSB at low address
36-37	2	RX Power High Warning	MSB at low address
38-39	2	RX Power Low Warning	MSB at low address
40-41	2	Optional Laser Temp High Alarm	MSB at low address
42-43	2	Optional Laser Temp Low Alarm	MSB at low address
44-45	2	Optional Laser Temp High Warning	MSB at low address
46-47	2	Optional Laser Temp Low Warning	MSB at low address
48-49	2	Optional TEC Current High Alarm	MSB at low address
50-51	2	Optional TEC Current Low Alarm	MSB at low address
52-53	2	Optional TEC Current High Warning	MSB at low address
54-55	2	Optional TEC Current Low Warning	MSB at low address
56-91	36	Ext Cal Constants or Additional Enhanced Features	Diagnostic calibration constants for optional External Calibration if External Calibration bit, A0h, byte 92, bit 4 is 1 Additional Enhanced Features advertisement, control and status if External Calibration bit, A0h, byte 92, bit 4 is 0
92-94	3	Reserved	
95	1	CC_DMI	Check code for Base Diagnostic Fields (addresses 0 to 94)
96-105	10	Diagnostics	Diagnostic Monitor Data (internally or externally calibrated)
106-109	4	Optional Diagnostics	Monitor Data for Optional Laser temperature and TEC current
110	1	Status/Control	Optional Status and Control Bits
111	1	Reserved	Reserved (was assigned to SFF-8079)
112-113	2	Alarm Flags	Diagnostic Alarm Flag Status Bits
114	1	Tx Input EQ control	Tx Input equalization level control
115	1	Rx Out Emphasis control	Rx Output emphasis level control
116-117	2	Warning Flags	Diagnostic Warning Flag Status Bits
118-119	2	Ext Status/Control	Extended module control and status bytes
120-126	7	Vendor Specific	Vendor specific memory addresses
127	1	Table Select	Optional Page Select

128-247	120	User EEPROM	User writable non-volatile memory
248-255	8	Vendor Control	Vendor specific control addresses
A2h Page 02h			
128-129	2	Reserved	Reserved for SFF-8690 (Tunable Transmitter)
130	1	Reserved	Reserved for future receiver controls
131	1	Rx Decision Threshold	RDT value setting
132-172	41	Reserved	Reserved for SFF-8690
173-255	83	Reserved	Reserved

Mechanical Dimension

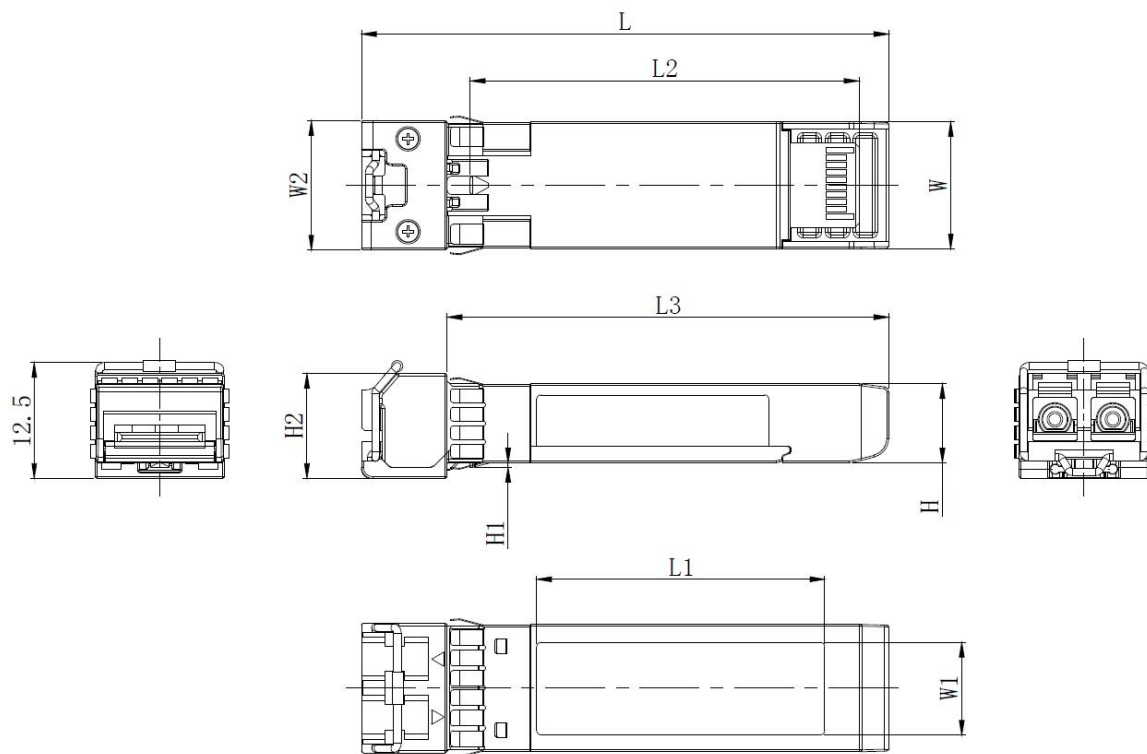


Unit: mm

	L	L1	L2	L3	W	W1	W2	H	H1	H2
MAX	56.9	31.2	41.95	47.7	13.8	10.2	14.0	8.6	0.6	11.5
Typical	56.7	31.0	41.80	47.5	13.7	10.0	—	8.5	0.5	11.3
MIN	56.5	30.8	41.65	47.3	13.5	9.8	—	8.4	0.4	11.1

Test Center

1. Performance Testing

Every fiber optic transceiver is thoroughly tested by the LSOLINK Assurance Program, which is equipped with the world's most advanced analytical equipment to ensure that our transceivers meet the industry's international public protocol standards while still functioning flawlessly in your facility.

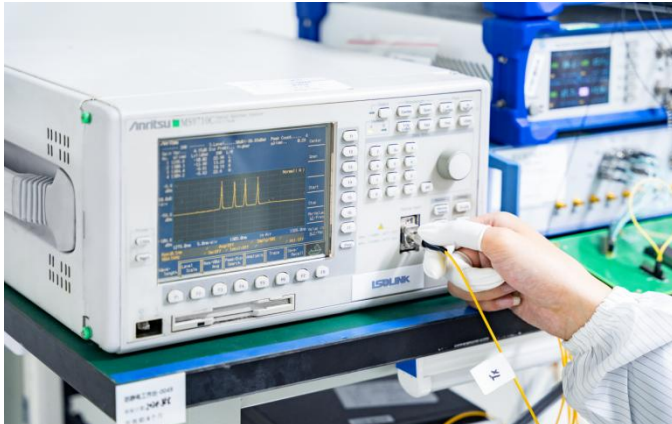

Optical Spectrum Inspection

Using the industry's leading optical spectrum analyser to check in real time that the parameters of the optical transceiver's laser comply with industry standards.

- **Peak:** Peak wavelength and peak level
- **2nd Peak:** Side-mode wavelength and level
- **Mean Wl:** Center wavelength
- **Total Power:** Total power of spectrum
- **SMSR:** Side-Mode Suppression Ratio



Optical Signal Quality Inspection

Using highly efficient sampling oscilloscopes and BERT testers, equipped with an automated test platform to accurately test the signal quality of the transceiver, test records are kept for up to 5 years to ensure the traceability of each transceiver.

- **Eye Mask Margin(NRZ)**
- **TDECQ(PAM4):**transmitter dispersion eye closure
- **OMA:** Optical modulation amplitude
- **BER:** Bit error rate
- **ER:** Extinction Ratio



Flow Pressure Test

Using multi-protocol network traffic analyser with various brands of switches to test the transceiver's ability to transmit at full speed.

- **Bandwidth:** Actual transceiver bandwidth on the port
- **Packet Loss**
- **Packet Errors:**CRC Errors/PCS Errors/Symbol Errors
- **LinkDown Counts**
- **latency**

Above is part of our test bed network equipment. For more information, Please click [download](#) for optical transceiver performance test report.

2. Quality Control

We adopt advanced quality management solutions. Each transceiver is self-inspected, including: 20x microscope inspection, 200x microscope inspection, and QC process inspection.



visual inspection



Microscopic inspection: 20X



Microscopic inspection: 200X



Reliability Verification



Optical endface inspection



OQC Inspection

3. Compatibility Testing

Each optical transceiver is tested in LSOLINK's library of compatibility test equipment to ensure perfect compatibility with multiple brands on the market.



Alcatel OS6900-X20



Arista DCS-7060SX2-48YC6-R



Cisco Nexus N9K-C9318YC-EX



Dell S4048-ON



Huawei S6720-30L-HI-24S



Juniper QFX5110-48S-4C

Above is part of our test bed network equipment. For more information, Please click [download](#) to get the compatibility test report of each brand of optical transceiver.


Order Information

Part Number	Description
1G-SFP-C40-xx	1000BASE-CWDM SFP 1270~1610nm 40km DOM LC SMF Transceiver Module
1G-SFP-C80-xx	1000BASE-CWDM SFP 1270~1610nm 80km DOM LC SMF Transceiver Module
1G-SFP-C120-xx	1000BASE-CWDM SFP 1470~1610nm 120km DOM Duplex LC SMF Transceiver Module
1G-SFP-D40-Cxx	1000BASE-DWDM SFP C17~C61 40km DOM LC SMF Transceiver Module
1G-SFP-D80-Cxx	1000BASE-DWDM SFP C17~C61 80km DOM LC SMF Transceiver Module

Further Information

 | Lighting the Path to Global Links

 **Web** | www.lsolink.com

 **Email** | For Sales@lsolink.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. LSOLINK assumes no responsibility for the use or reliability of equipment or software not provided by LSOLINK. Copyright LSOLINK.COM All Rights