

# Product Specification

1.25Gb/s SFP 1550nm 80km Optical Transceiver

P/N: 1G-SFP-ZX



## Features

- Hot Pluggable SFP form factor
- Operating data rate 1.25Gbps
- Single +3.3V power supply
- Duplex LC connector
- Max power dissipation <1.0W
- Up to 80km transmission distance on 9/125um SMF
- Differential LVPECL inputs and outputs
- TTL signal detect indicator
- PIN receivers
- Built-in digital diagnostic function
- Commercial temperature range 0°C to 70°C

## Compliance

- SFP MSA
- Compliant with SFP Electrical MSA SFF-8431
- Compliant with SFP Mechanical MSA SFF-8432
- SFF-8472
- IEEE 802.3ae
- RoHS

## Applications

- Switches with SFP ports
- Router with SFP Ports
- Server or Network Adapter Card
- Optical Transmission System
- Other devices with SFP Ports

## Description

The 1G-SFP-ZX is a high-performance single-mode SFP transceiver designed for long-distance Gigabit Ethernet applications. Operating at a wavelength of 1550nm, this transceiver supports data rates of up to 1.25Gbps and is compliant with the IEEE 802.3z Gigabit Ethernet standard and SFP Multi-Source Agreement (MSA). It is specifically engineered for use with single-mode fiber (SMF), enabling transmission distances of up to 80 kilometers, making it ideal for metropolitan area networks (MANs), wide area networks (WANs), and other long-haul networking scenarios.

The 1G-SFP-ZX is a reliable and cost-effective solution for extending network connectivity over extended distances without compromising performance. Its hot-pluggable design allows for easy installation and maintenance, while its low power consumption ensures energy efficiency. With features such as digital diagnostics monitoring (DDM) capabilities, it provides real-time performance tracking, enhancing network management and troubleshooting. Whether deployed in telecommunications, enterprise networks, or data center interconnects, the 1G-SFP-ZX delivers the durability, flexibility, and performance required for demanding long-range applications.

## Product performance Specifications

### 1、Basic Product Characteristics

| Parameter                         | Symbol          | Min | Max  | Unit |
|-----------------------------------|-----------------|-----|------|------|
| Storage Temperature               | T <sub>s</sub>  | -40 | +85  | °C   |
| Supply Voltage                    | V <sub>CC</sub> | 0   | +3.7 | V    |
| Relative Humidity(Non-condensing) | RH              | +5  | +85  | %    |
| Power Dissipation                 | PD              |     | 1    | W    |
| Link Distance                     | D               |     | 80   | km   |

### 2、Product Optical and Electrical Characteristics

| Parameter                  | Symbol          | Min   | Typ. | Max   | Unit |
|----------------------------|-----------------|-------|------|-------|------|
| Transmitter                |                 |       |      |       |      |
| Operating Case Temperature | T <sub>c</sub>  | 0     |      | +70   | °C   |
| Power Supply Voltage       | V <sub>CC</sub> | 3.135 | 3.3  | 3.465 | V    |
| Data Rate                  | DR              |       | 1250 |       | Mbps |
| Power Supply Current       | I <sub>CC</sub> |       |      | 300   | mA   |

|                              |                 |      |      |      |     |
|------------------------------|-----------------|------|------|------|-----|
| Output Optical Power         | PO              | -2   |      | 5    | dBm |
| Optical Rise Time            | TR              |      | 100  | 175  | ps  |
| Optical Fall Time            | TF              |      | 100  | 175  | ps  |
| -20dB Spectral Width         | $\Delta\lambda$ |      |      | 1    | nm  |
| Side Mode Suppression Ratio  | SMSR            | 30   |      |      | dB  |
| Extinction Ratio             | ER              | 9.5  |      |      | dB  |
| Optical Power for TX DISABLE | Ptx-dis         |      |      | -30  | dBm |
| Receiver                     |                 |      |      |      |     |
| Differential Output Voltage  | Vout p-p        | 600  |      | 1000 | mV  |
| Receiver Sensitivity         | Sen.            |      |      | -26  | dBm |
| Overload Input Power         | SO              | -3   |      |      | dBm |
| Los Asserted                 | PA              | -35  |      |      | dBm |
| Los De-asserted              | PD              |      |      | -23  |     |
| Receiver Optical Wavelength  | $\lambda_{in}$  | 1260 | 1550 | 1620 | nm  |
| Maximum Input Power          | Pmax            | 0    |      |      | dBm |

## Recommended Host Board Power Supply Circuit

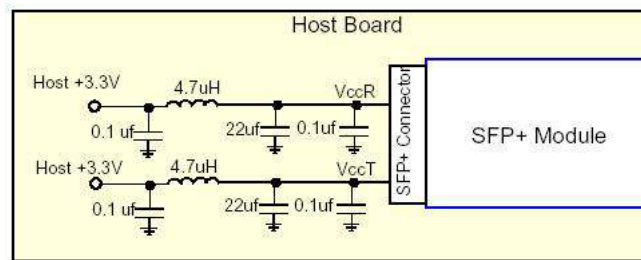


Figure 1: Recommended Host Board Power Supply Circuit

## Recommended Interface Circuit

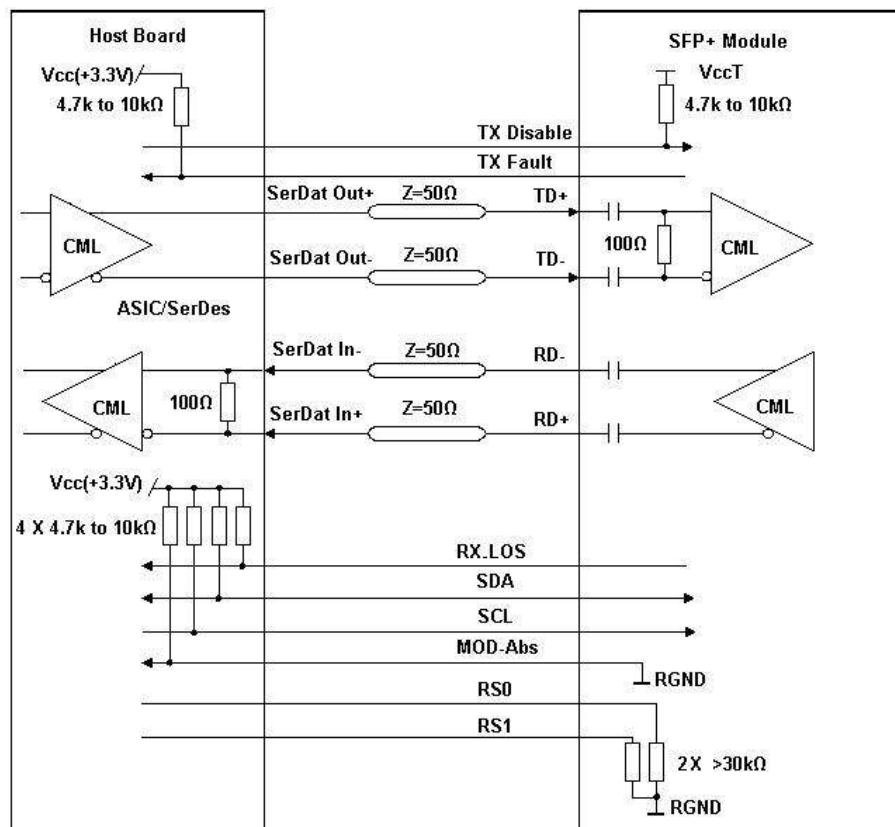


Figure2: Recommended Interface Circuit

## Pin-out Definition

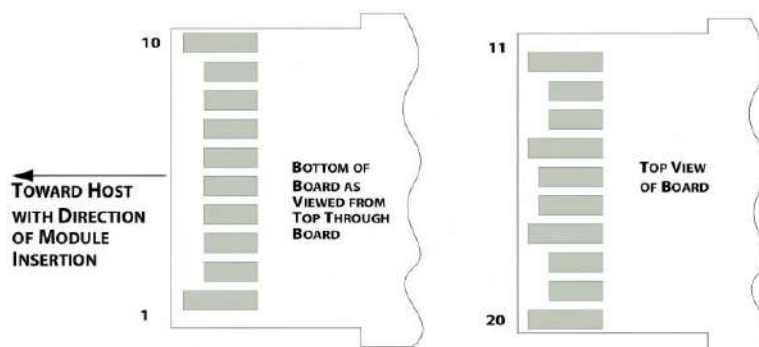


Figure3:Pin view

## Pin Function Definitions

| Pin | Logic     | Symbol     | Description  | Note |
|-----|-----------|------------|--|------|
| 1   |           | VeeT       | Module Transmitter Ground  | 1    |
| 2   | LVTTL-O   | TX_Fault   | Module Transmitter Fault   | 2    |
| 3   | LVTTL-I   | TX_Disable | Transmitter Disable; Turns off transmitter laser output  | 3    |
| 4   | LVTTL-I/O | SDA        | 2-wire Serial Interface Data Line (Same as MOD-DEF2 as defined in the INF-8074i)   | 4    |
| 5   | LVTTL-I/O | SCL        | 2-wire Serial Interface Clock (Same as MOD-DEF1 as defined in the INF-8074i)   | 4    |
| 6   |           | MOD_ABS    | Module Absent, connected to VeeT or VeeR in the module   | 5    |
| 7   | LVTTL-I   | RS0        | Adaptive multi-rate operation  | 6    |
| 8   | LVTTL-O   | RX_LOS     | Receiver Loss of Signal Indication (In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect) | 2    |
| 9   | LVTTL-I   | RS1        | Adaptive multi-rate operation  | 6    |
| 10  |           | VeeR       | Module Receiver Ground   | 1    |
| 11  |           | VeeR       | Module Receiver Ground   | 1    |
| 12  | CML-O     | RD-        | Receiver Inverted Data Output  |      |
| 13  | CML-O     | RD+        | Receiver Non-Inverted Data Output  |      |
| 14  |           | VeeR       | Module Receiver Ground   | 1    |
| 15  |           | VccR       | Module Receiver 3.3 V Supply   |      |
| 16  |           | VccT       | Module Transmitter 3.3 V Supply  |      |
| 17  |           | VeeT       | Module Transmitter Ground  | 1    |
| 18  | CML-I     | TD+        | Transmitter Non-Inverted Data Input  |      |
| 19  | CML-I     | TD-        | Transmitter Inverted Data Input  |      |
| 20  |           | VeeT       | Module Transmitter Ground  | 1    |

**Note1:** The module signal ground pins, VeeR and VeeT, shall be isolated from the module case.

**Note2:** This pin is an open collector/drain output pin and shall be pulled up with 4.7kΩ-10kΩ to Host\_Vcc on the host board. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module VccT/R + 0.5V.


**Note3:** This pin is an open collector/drain input pin and shall be pulled up with 4.7kΩ-10kΩ to VccT in the module.

**Note4:** See SFF-8431 4.2 2-wire Electrical Specifications.

**Note5:** This pin shall be pulled up with 4.7kΩ-10kΩ to Host\_Vcc on the host board.

**Note6:** Connect with 30kΩ load pulled down to GND in the module.

## Monitoring Specification

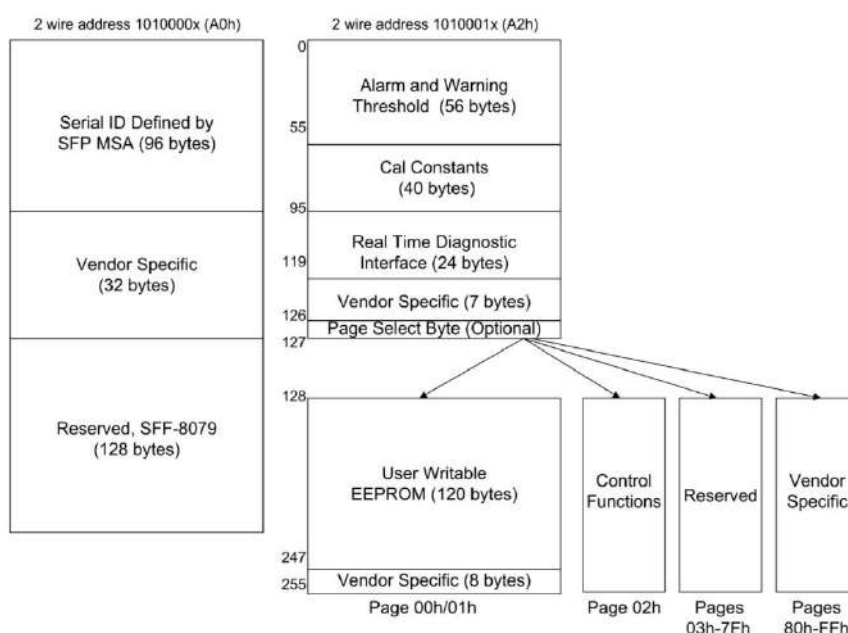

**Figure4:**Memory map

## Memory map Table

| A0h                  | Bytes | Name  | Description   |
|----------------------|-------|---|---|
| <b>A0h ID Fields</b> |       |   |   |
| 0                    | 1     | Identifier                                  | Type of transceiver   |
| 1                    | 1     | Ext. Identifier                             | Extended identifier of type of transceiver  |
| 2                    | 1     | Connector                                   | Code for connector type   |
| 3-10                 | 8     | Transceiver                                 | Code for electronic or optical compatibility  |
| 11                   | 1     | Encoding                                    | Code for high speed serial encoding algorithm   |
| 12                   | 1     | Signaling Rate, Nominal                     | Nominal signaling rate, units of 100 MBd.   |
| 13                   | 1     | Rate Identifier                             | Type of rate select functionality   |
| 14                   | 1     | Length (SMF,km) or Copper Cable Attenuation | Link length supported for single-mode fiber, units of km, or copper cable attenuation in dB at 12.9 GHz |

|         |     |  |  |
|---------|-----|--|--|
| 15      | 1   | Length (SMF) or Copper Cable Attenuation | Link length supported for single-mode fiber, units of 100 m, or copper cable attenuation in dB at 25.78 GHz                      |
| 16      | 1   | Length (50 um, OM2)                      | Link length supported for 50 um OM2 fiber, units of 10 m   |
| 17      | 1   | Length (62.5 um, OM1)                    | Link length supported for 62.5 um OM1 fiber, units of 10 m   |
| 18      | 1   | Length (OM4 or copper cable)             | Link length supported for 50um OM4 fiber, units of 10 m. Alternatively, copper or direct attach cable, units of m                |
| 19      | 1   | Length (OM3) or Cable length, additional | Link length supported for 50 um OM3 fiber, units of 10 m. Alternatively, copper or direct attach cable multiplier and base value |
| 20-35   | 16  | Vendor name                              | SFP vendor name (ASCII)  |
| 36      | 1   | Transceiver                              | Code for electronic or optical compatibility   |
| 37-39   | 3   | Vendor OUI                               | SFP vendor IEEE company ID   |
| 40-55   | 16  | Vendor PN                                | Part number provided by SFP vendor (ASCII)   |
| 56-59   | 4   | Vendor rev                               | Revision level for part number provided by vendor (ASCII)  |
| 60-61   | 2   | Wavelength                               | Laser wavelength (Passive/Active Cable Specification Compliance)   |
| 62      | 1   | Fibre Channel Speed 2                    | Transceiver's Fibre Channel speed capabilities   |
| 63      | 1   | CC_BASE                                  | Check code for Base ID Fields (addresses 0 to 62)  |
| 64-65   | 2   | Options                                  | Indicates which optional transceiver signals are implemented   |
| 66      | 1   | Signaling Rate, max                      | Upper signaling rate margin, units of %  |
| 67      | 1   | Signaling Rate, min                      | Lower signaling rate margin, units of %  |
| 68-83   | 16  | Vendor SN                                | Serial number provided by vendor (ASCII)   |
| 84-91   | 8   | Date code                                | Vendor's manufacturing date code   |
| 92      | 1   | Diagnostic Monitoring Type               | Indicates which type of diagnostic monitoring is implemented (if any) in the transceiver   |
| 93      | 1   | Enhanced Options                         | Indicates which optional enhanced features are implemented (if any) in the transceiver   |
| 94      | 1   | SFF-8472 Compliance                      | Indicates which revision of SFF-8472 the transceiver complies with.  |
| 95      | 1   | CC_EXT                                   | Check code for the Extended ID Fields (addresses 64 to 94)   |
| 96-127  | 32  | Vendor Specific                          | Vendor Specific EEPROM   |
| 128-255 | 128 | Reserved                                 | Reserved (was assigned to SFF-8079)  |

## A2h ID Fields


|       |   |                      |                    |
|-------|---|----------------------|--------------------|
| 00-01 | 2 | Temp High Alarm      | MSB at low address |
| 02-03 | 2 | Temp Low Alarm       | MSB at low address |
| 04-05 | 2 | Temp High Warning    | MSB at low address |
| 06-07 | 2 | Temp Low Warning     | MSB at low address |
| 08-09 | 2 | Voltage High Alarm   | MSB at low address |
| 10-11 | 2 | Voltage Low Alarm    | MSB at low address |
| 12-13 | 2 | Voltage High Warning | MSB at low address |
| 14-15 | 2 | Voltage Low Warning  | MSB at low address |
| 16-17 | 2 | Bias High Alarm      | MSB at low address |
| 18-19 | 2 | Bias Low Alarm       | MSB at low address |
| 20-21 | 2 | Bias High Warning    | MSB at low address |
| 22-23 | 2 | Bias Low Warning     | MSB at low address |

|                        |     |   |  |
|------------------------|-----|---|--|
| 24-25                  | 2   | TX Power High Alarm                               | MSB at low address   |
| 26-27                  | 2   | TX Power Low Alarm                                | MSB at low address   |
| 28-29                  | 2   | TX Power High Warning                             | MSB at low address   |
| 30-31                  | 2   | TX Power Low Warning                              | MSB at low address   |
| 32-33                  | 2   | RX Power High Alarm                               | MSB at low address   |
| 34-35                  | 2   | RX Power Low Alarm                                | MSB at low address   |
| 36-37                  | 2   | RX Power High Warning                             | MSB at low address   |
| 38-39                  | 2   | RX Power Low Warning                              | MSB at low address   |
| 40-41                  | 2   | Optional Laser Temp High Alarm                    | MSB at low address   |
| 42-43                  | 2   | Optional Laser Temp Low Alarm                     | MSB at low address   |
| 44-45                  | 2   | Optional Laser Temp High Warning                  | MSB at low address   |
| 46-47                  | 2   | Optional Laser Temp Low Warning                   | MSB at low address   |
| 48-49                  | 2   | Optional TEC Current High Alarm                   | MSB at low address   |
| 50-51                  | 2   | Optional TEC Current Low Alarm                    | MSB at low address   |
| 52-53                  | 2   | Optional TEC Current High Warning                 | MSB at low address   |
| 54-55                  | 2   | Optional TEC Current Low Warning                  | MSB at low address   |
| 56-91                  | 36  | Ext Cal Constants or Additional Enhanced Features | Diagnostic calibration constants for optional External Calibration if External Calibration bit, A0h, byte 92, bit 4 is 1<br>Additional Enhanced Features advertisement, control and status if External Calibration bit, A0h, byte 92, bit 4 is 0 |
| 92-94                  | 3   | Reserved  |  |
| 95                     | 1   | CC_DMI  | Check code for Base Diagnostic Fields (addresses 0 to 94)  |
| 96-105                 | 10  | Diagnostics                                       | Diagnostic Monitor Data (internally or externally calibrated)  |
| 106-109                | 4   | Optional Diagnostics                              | Monitor Data for Optional Laser temperature and TEC current  |
| 110                    | 1   | Status/Control                                    | Optional Status and Control Bits   |
| 111                    | 1   | Reserved  | Reserved (was assigned to SFF-8079)  |
| 112-113                | 2   | Alarm Flags                                       | Diagnostic Alarm Flag Status Bits  |
| 114                    | 1   | Tx Input EQ control                               | Tx Input equalization level control  |
| 115                    | 1   | Rx Out Emphasis control                           | Rx Output emphasis level control   |
| 116-117                | 2   | Warning Flags                                     | Diagnostic Warning Flag Status Bits  |
| 118-119                | 2   | Ext Status/Control                                | Extended module control and status bytes   |
| 120-126                | 7   | Vendor Specific                                   | Vendor specific memory addresses   |
| 127                    | 1   | Table Select                                      | Optional Page Select   |
| <b>A2h Page 00-01h</b> |     |   |  |
| 128-247                | 120 | User EEPROM                                       | User writable non-volatile memory  |
| 248-255                | 8   | Vendor Control                                    | Vendor specific control addresses  |
| <b>A2h Page 02h</b>    |     |   |  |
| 128-129                | 2   | Reserved  | Reserved for SFF-8690 (Tunable Transmitter)  |
| 130                    | 1   | Reserved  | Reserved for future receiver controls  |
| 131                    | 1   | Rx Decision Threshold                             | RDT value setting  |



|         |    |          |                       |
|---------|----|----------|-----------------------|
| 132-172 | 41 | Reserved | Reserved for SFF-8690 |
| 173-255 | 83 | Reserved | Reserved              |

## Mechanical Dimension

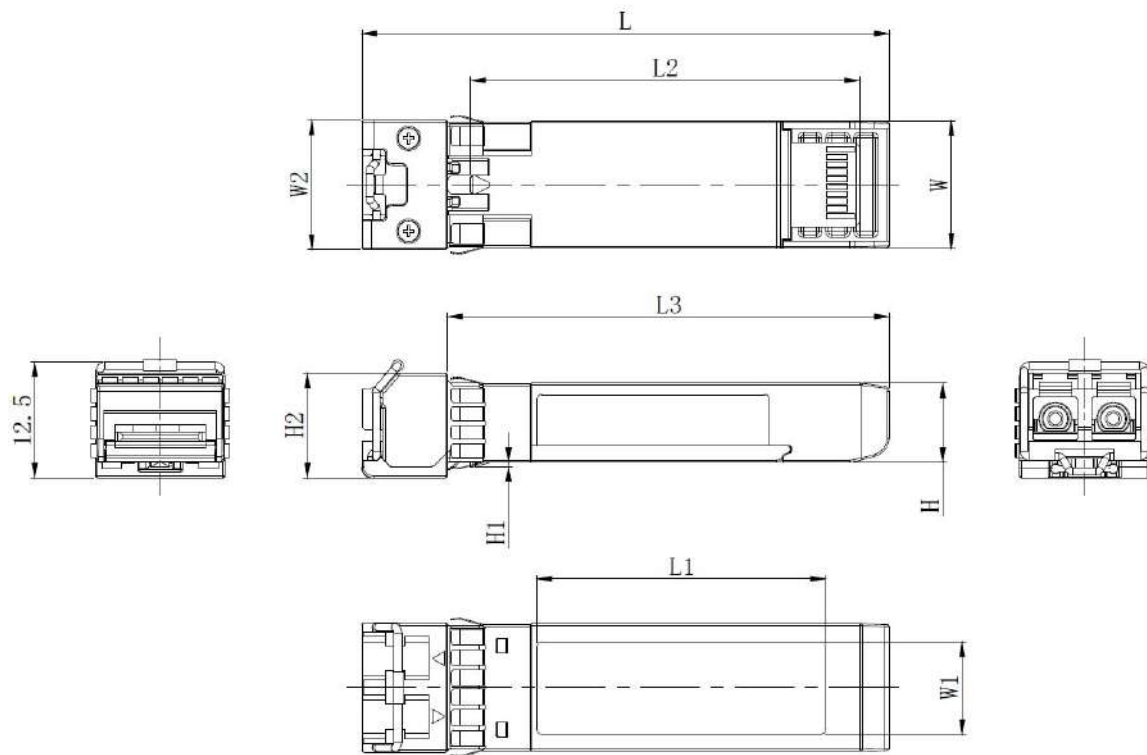


Unit: mm

|         | L    | L1   | L2    | L3   | W    | W1   | W2   | H   | H1  | H2   |
|---------|------|------|-------|------|------|------|------|-----|-----|------|
| MAX     | 56.9 | 31.2 | 41.95 | 47.7 | 13.8 | 10.2 | 14.0 | 8.6 | 0.6 | 11.5 |
| Typical | 56.7 | 31.0 | 41.80 | 47.5 | 13.7 | 10.0 | —    | 8.5 | 0.5 | 11.3 |
| MIN     | 56.5 | 30.8 | 41.65 | 47.3 | 13.5 | 9.8  | —    | 8.4 | 0.4 | 11.1 |

## Test Center

### 1、Performance Testing

Every fiber optic transceiver is thoroughly tested by the LSOLINK Assurance Program, which is equipped with the world's most advanced analytical equipment to ensure that our transceivers meet the industry's international public protocol standards while still functioning flawlessly in your facility.

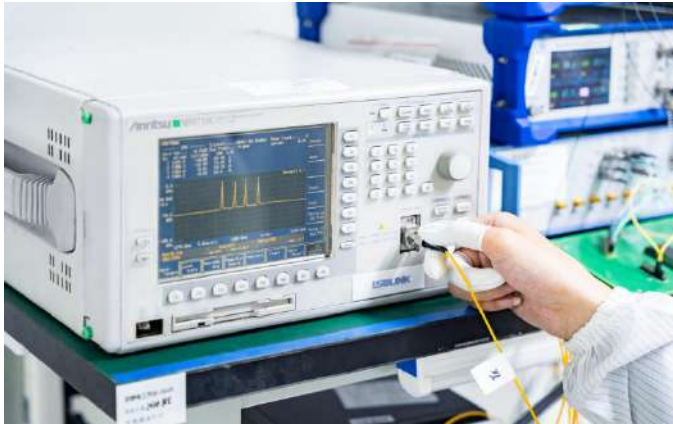

#### Optical Spectrum Inspection

Using the industry's leading optical spectrum analyser to check in real time that the parameters of the optical transceiver's laser comply with industry standards.

- **Peak:** Peak wavelength and peak level
- **2nd Peak:** Side-mode wavelength and level
- **Mean Wl:** Center wavelength
- **Total Power:** Total power of spectrum
- **SMSR:** Side-Mode Suppression Ratio



#### Optical Signal Quality Inspection

Using highly efficient sampling oscilloscopes and BERT testers, equipped with an automated test platform to accurately test the signal quality of the transceiver, test records are kept for up to 5 years to ensure the traceability of each transceiver.

- **Eye Mask Margin(NRZ)**
- **TDECQ(PAM4):**transmitter dispersion eye closure
- **OMA:** Optical modulation amplitude
- **BER:** Bit error rate
- **ER:** Extinction Ratio



#### Flow Pressure Test

Using multi-protocol network traffic analyser with various brands of switches to test the transceiver's ability to transmit at full speed.

- **Bandwidth:** Actual transceiver bandwidth on the port
- **Packet Loss**
- **Packet Errors:**CRC Errors/PCS Errors/Symbol Errors
- **LinkDown Counts**
- **latency**

Above is part of our test bed network equipment. For more information, Please click [download](#) for optical transceiver performance test report.

## 2、Quality Control

We adopt advanced quality management solutions. Each transceiver is self-inspected, including: 20x microscope inspection, 200x microscope inspection, and QC process inspection.



**visual inspection**



**Microscopic inspection: 20X**



**Microscopic inspection: 200X**



**Reliability Verification**



**Optical endface inspection**



**OQC Inspection**



### 3、Compatibility Testing

Each optical transceiver is tested in LSOLINK's library of compatibility test equipment to ensure perfect compatibility with multiple brands on the market.



**Arista DCS-7060SX2-48YC6-R**



**Aruba 8360-32Y4C**



**Cisco Nexus N9K-C9318YC-EX**



**Dell S4048-ON**



**Huawei S6720-30L-HI-24S**




**Juniper QFX5110-48S-4C**

Above is part of our test bed network equipment. For more information, Please click [download](#) to get the compatibility test report of each brand of optical transceiver.

## Order Information

| Part Number | Description   |
|-------------|---|
| 1G-SFP-SX   | 1000BASE-SX SFP 850nm 550m DOM LC MMF Transceiver Module  |
| 1G-SFP-LX   | 1000BASE-LX SFP 1310nm 10km DOM LC Transceiver SMF Module |
| 1G-SFP-EX   | 1000BASE-EX SFP 1550nm 40km DOM LC Transceiver SMF Module |
| 1G-SFP-ZX   | 1000BASE-ZX SFP 1550nm 80km DOM LC Transceiver SMF Module |
| 1G-SFP-T-C  | 1000BASE-T SFP Copper RJ45 100m Transceiver Module        |
| 1G-SFP-T-Z  | 10/100/1000BASE-T SFP Copper RJ45 100m Transceiver Module |

## Further Information

 | Lighting the Path to Global Links

 **Web** | [www.lsolink.com](http://www.lsolink.com)

 **Email** | For [Sales@lsolink.com](mailto:Sales@lsolink.com)

## Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. LSOLINK assumes no responsibility for the use or reliability of equipment or software not provided by LSOLINK. Copyright LSOLINK.COM All Rights