

# Product Specification

850Gb/s OSFP Active Electrical Cable

P/N: 800G-OSFP-AE



## Features

- Hot Pluggable OSFP form factor
- Wire AWG:30AWG,28AWG,26AWG
- Available length range 4M~7M
- Operating data rate 850Gbps
- Power supply: +3.3V
- Max power dissipation <12W
- 8-Channel Full-Duplex active electrical cable
- Commercial temperature range 0°C to 70°C

## Compliance

- Compliant with OSFP MSA
- Compliant with CMIS 5.1
- RoHS

## Applications

- 800G Ethernet
- Cloud Services
- Data Center Interconnect
- Data center Enterprise networking
- Switches with OSFP ports

## Description

The 800G-OSFP-AE is an 800Gb/s twin-port OSFP Active Electrical Cable (AEC) designed for high-speed 800G networking. With a finned top design, this AEC solution ensures efficient heat dissipation, making it ideal for high-performance data center and cloud computing applications.

Unlike passive copper cables, the 800G-OSFP-AE integrates active components and driver chips within the connectors to enhance signal integrity. It effectively addresses data loss challenges in PAM4 signal transmission, enabling reliable high-speed connectivity. This advanced design allows for stable data transmission over distances of up to 7 meters without excessive signal attenuation.

The 800G-OSFP-AE cable provides a power-efficient and cost-effective connectivity solution, offering higher port bandwidth, increased density, and improved configurability. By reducing power consumption and ensuring reliable long-distance transmission, it meets the growing demands of modern data centers and high-performance computing environments.

## Product performance Specifications

### 1. Basic Product Characteristics

| Parameter                  | Symbol   | Min   | Typ. | Max   | Unit |
|----------------------------|----------|-------|------|-------|------|
| Storage Temperature        | $T_s$    | -40   | -    | +85   | °C   |
| Supply Voltage             | $V_{CC}$ | -0.5  | 3.3  | 4.0   | V    |
| Relative Humidity          | RH       | 5     | -    | 85    | %    |
| Operating Case Temperature | $T_c$    | 0     | -    | 70    | °C   |
| Power Supply Voltage       | $V_{CC}$ | 3.135 | 3.3  | 3.465 | V    |
| Power Dissipation          | PD       | -     | -    | 12    | W    |
| Data Rate                  | DR       | -     | 850  | -     | Gbps |

## 2. Product Optical and Electrical Characteristics

| Test Type                  | Test Item                       | 24AWG  | 26AWG  | 28AWG   | 30AWG  |
|----------------------------|---------------------------------|--|--|---|--|
| Electrical Characteristics | Differential impedance          | 100±5Ω at TDR  | 100±5Ω   | 100±5Ω  | 100±5Ω at TDR  |
|                            | Mutual capacitance              | 14pF/ft nominal  | 14pF/ft nominal  | 14pF/ft nominal   | 14pF/ft nominal  |
|                            | Time delay                      | 1.31ns/ft nominal, (4.3ns/m) nominal   | 1.35ns/ft nominal  | 1.35ns/ft nominal   | 1.35ns/ft nominal, (4.3ns/m) nominal   |
|                            | Time delay skew (within pairs)  | 80ps/10m maximum   | 120ps/8.5m maximum   | 120ps/7m maximum  | 50ps/5.5m maximum  |
|                            | Time delay skew (between pairs) | 350ps/10m maximum  | 500ps/8.5m maximum   | 500ps/7m maximum  | 350ps/5.5m maximum   |
|                            | Attenuation                     | 10dB/10m maximum at 1.25Ghz  | 10dB/8.5m maximum at 1.25Ghz   | 10dB/7m maximum at 1.25Ghz  | 8.4dB/5.5m maximum at 1.25Ghz  |
|                            | Conductor DC Resistance         | 0.026Ω /ft maximum at 20°C   | 0.04Ω /ft maximum at 20°C  | 0.06Ω/ft maximum at 20°C  | 0.01Ω/ft maximum at 20°C   |
| Physical Characteristics   | Conductors (two pair)           | 24AWG Solid, Silver plated copper  | 26AWG Solid, Silver plated copper  | 28AWG Solid, Silver plated copper   | 30AWG Solid, Silver plated copper  |
|                            | Insulation                      | Foam polyolefin  | Foam polyolefin  | Foam polyolefin   | Foam polyolefin  |
|                            | Pair drain wire                 | 26AWG Solid, Silver plated copper  | 28AWG Solid, Silver plated copper  | 30AWG Solid, Silver plated copper   | 30AWG Solid, Silver plated copper  |
|                            | Overall cable shield            | Aluminum/polyester tape, 125% coverage, Tin plated copper braid, 38AWG, 85% coverage | Aluminum/polyester tape, 125% coverage, Tin plated copper braid, 38AWG, 85% coverage | Aluminum/polyester er tape, 125% coverage, Tin plated copper braid, 38AWG, 85% coverage | Aluminum/polyester tape, 125% coverage, Tin plated copper braid, 38AWG, 85% coverage |
|                            | Outer diameter                  | 6.0mm  | 5.2mm  | 4.7mm   | 4.2mm  |

## Recommended Host Board Power Supply Circuit

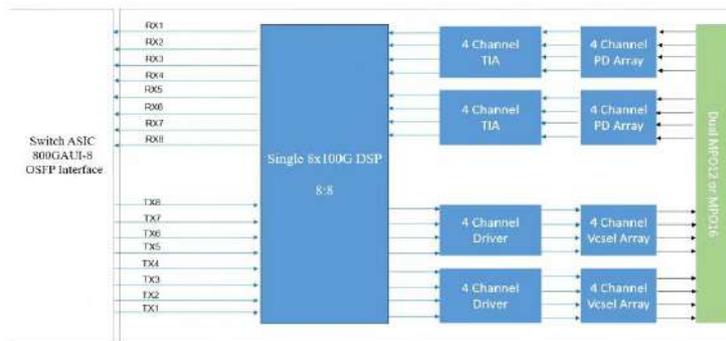


Figure 1: Module Block Diagram

## Recommended Interface Circuit

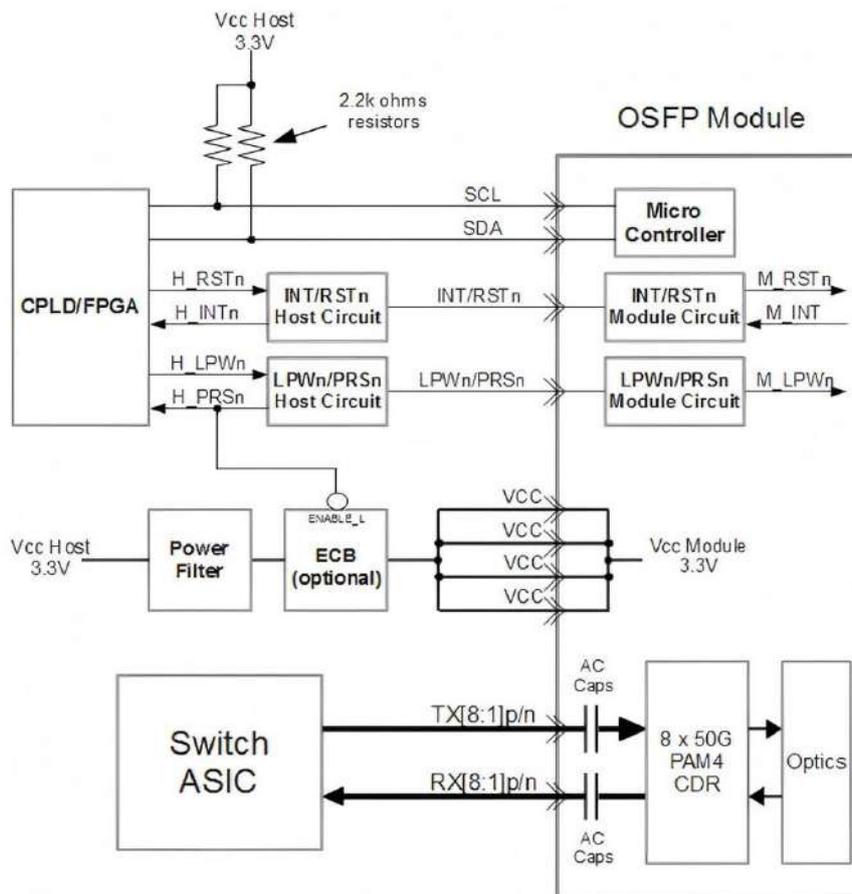


Figure2: Recommended Interface Circuit

## Pin-out Definition

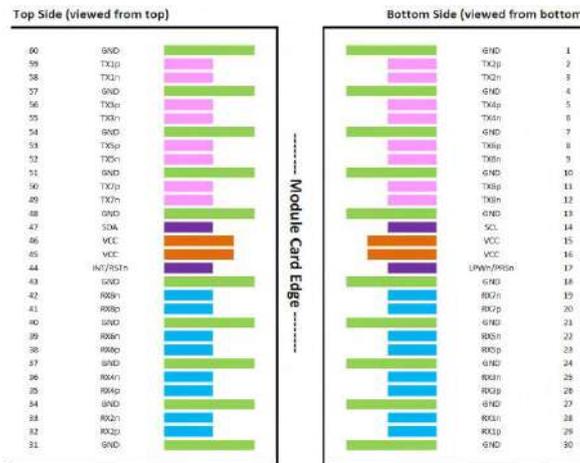


Figure3:Pin view

## Pin Function Definitions

| Pin | Logic       | Symbol    | Description                     | Note |
|-----|-------------|-----------|---------------------------------|------|
| 1   |             | GND       | Ground                          |      |
| 2   | CML-I       | TX2p      | Transmitter Data Non-Inverted   |      |
| 3   | CML-I       | TX2n      | Transmitter Data Inverted       |      |
| 4   |             | GND       | Ground                          |      |
| 5   | CML-I       | TX4p      | Transmitter Data Non-Inverted   |      |
| 6   | CML-I       | TX4n      | Transmitter Data Inverted       |      |
| 7   |             | GND       | Ground                          |      |
| 8   | CML-I       | TX6p      | Transmitter Data Non-Inverted   |      |
| 9   | CML-I       | TX6n      | Transmitter Data Inverted       |      |
| 10  |             | GND       | Ground                          |      |
| 11  | CML-I       | TX8p      | Transmitter Data Non-Inverted   |      |
| 12  | CML-I       | TX8n      | Transmitter Data Inverted       |      |
| 13  |             | GND       | Ground                          |      |
| 14  | LVC MOS-I/O | SCL       | 2-wire Serial interface clock   | 1    |
| 15  |             | VCC       | +3.3V Power                     |      |
| 16  |             | VCC       | +3.3V Power                     |      |
| 17  | Multi-Level | LPWn/PRSn | Low-Power Mode / Module Present | 2    |
| 18  |             | GND       | Ground                          |      |
| 19  | CML-O       | RX7n      | Receiver Data Inverted          |      |
| 20  | CML-O       | RX7p      | Receiver Data Non-Inverted      |      |

|    |             |          |                                 |   |
|----|-------------|----------|---------------------------------|---|
| 21 |             | GND      | Ground                          |   |
| 22 | CML-O       | RX5n     | Receiver Data Inverted          |   |
| 23 | CML-O       | RX5p     | Receiver Data Non-Inverted      |   |
| 24 |             | GND      | Ground                          |   |
| 25 | CML-O       | RX3n     | Receiver Data Inverted          |   |
| 26 | CML-O       | RX3p     | Receiver Data Non-Inverted      |   |
| 27 |             | GND      | Ground                          |   |
| 28 | CML-O       | RX1n     | Receiver Data Inverted          |   |
| 29 | CML-O       | RX1p     | Receiver Data Non-Inverted      |   |
| 30 |             | GND      | Ground                          |   |
| 31 |             | GND      | Ground                          |   |
| 32 | CML-O       | RX2p     | Receiver Data Non-Inverted      |   |
| 33 | CML-O       | RX2n     | Receiver Data Inverted          |   |
| 34 |             | GND      | Ground                          |   |
| 35 | CML-O       | RX4p     | Receiver Data Non-Inverted      |   |
| 36 | CML-O       | RX4n     | Receiver Data Inverted          |   |
| 37 |             | GND      | Ground                          |   |
| 38 | CML-O       | RX6p     | Receiver Data Non-Inverted      |   |
| 39 | CML-O       | RX6n     | Receiver Data Inverted          |   |
| 40 |             | GND      | Ground                          |   |
| 41 | CML-O       | RX8p     | Receiver Data Non-Inverted      |   |
| 42 | CML-O       | RX8n     | Receiver Data Inverted          |   |
| 43 |             | GND      | Ground                          |   |
| 44 | Multi-Level | INT/RSTn | Module Interrupt / Module Reset | 2 |
| 45 |             | VCC      | +3.3V Power                     |   |
| 46 |             | VCC      | +3.3V Power                     |   |
| 47 | LVCNOS-I/O  | SDA      | 2-wire Serial interface data    | 1 |
| 48 |             | GND      | Ground                          |   |
| 49 | CML-I       | TX7n     | Transmitter Data Inverted       |   |
| 50 | CML-I       | TX7p     | Transmitter Data Non-Inverted   |   |
| 51 |             | GND      | Ground                          |   |
| 52 | CML-I       | TX5n     | Transmitter Data Inverted       |   |
| 53 | CML-I       | TX5p     | Transmitter Data Non-Inverted   |   |
| 54 |             | GND      | Ground                          |   |
| 55 | CML-I       | TX3n     | Transmitter Data Inverted       |   |
| 56 | CML-I       | TX3p     | Transmitter Data Non-Inverted   |   |
| 57 |             | GND      | Ground                          |   |
| 58 | CML-I       | TX1n     | Transmitter Data Inverted       |   |

|    |       |      |                               |
|----|-------|------|-------------------------------|
| 59 | CML-I | TX1p | Transmitter Data Non-Inverted |
| 60 |       | GND  | Ground                        |

**Note1:** Open-Drain with pull up resistor on Host.

**Note2:** See pin description for required circuit.

## Monitoring Specification

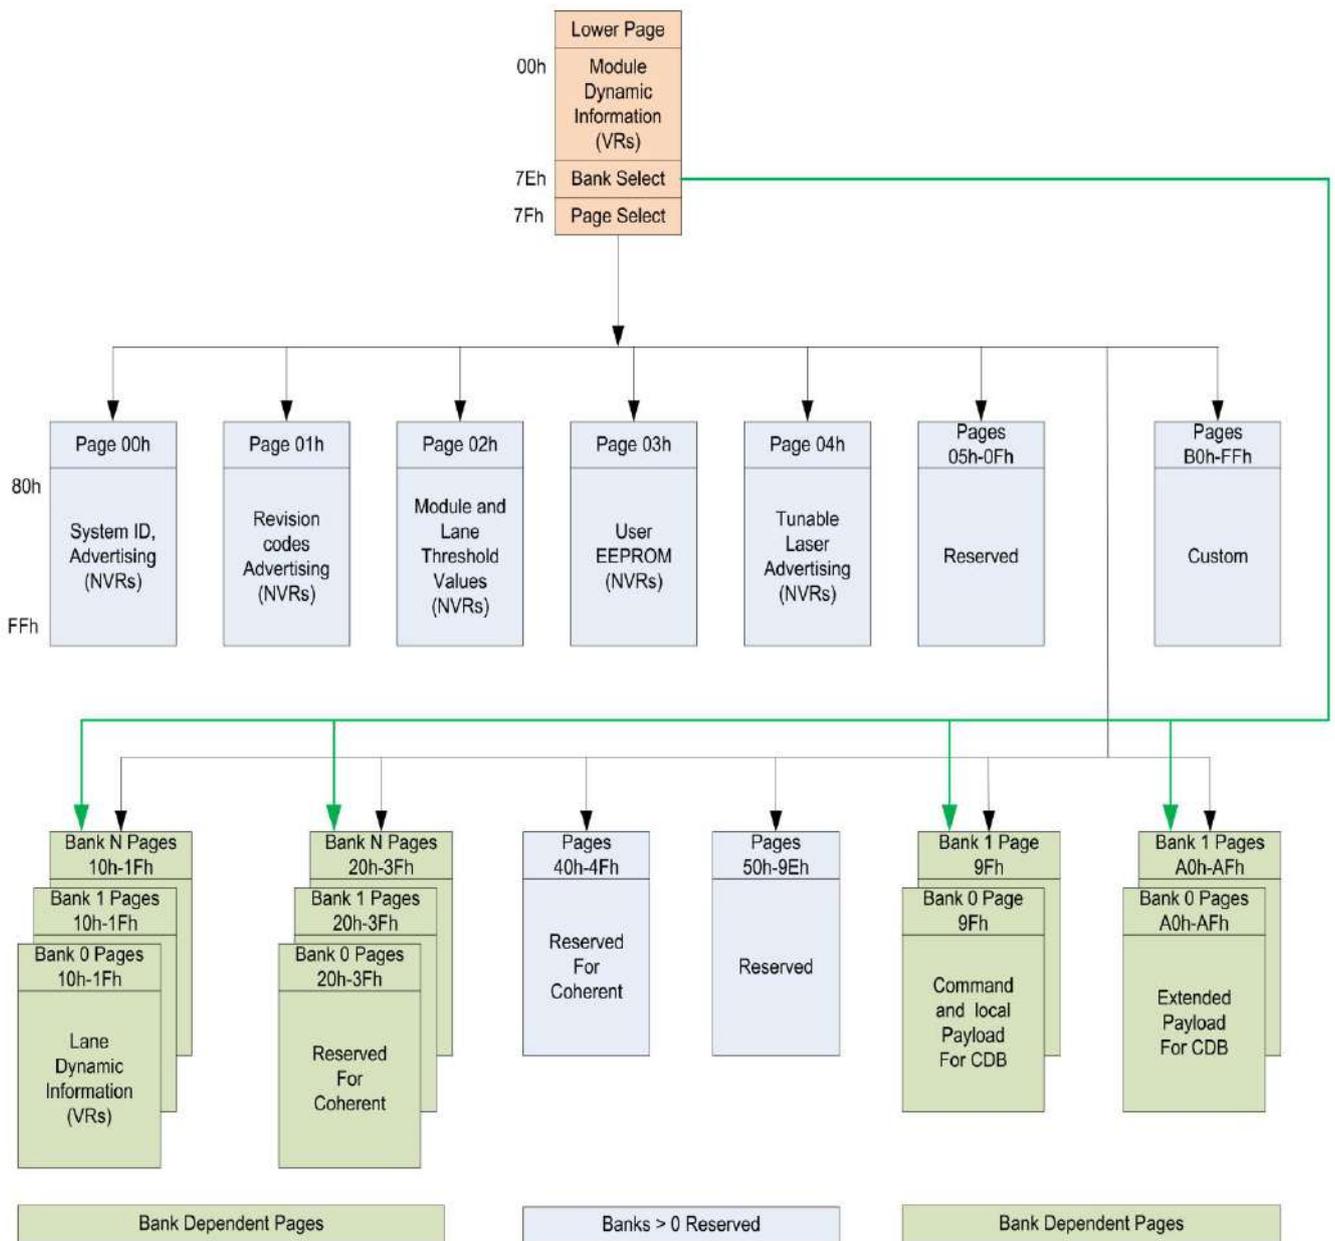



Figure4:Memory map

## Memory map Table

| Byte                  | Unit | Name                      | Description   |
|-----------------------|------|---------------------------|---|
| <b>Lower Page 00h</b> |      |                           |   |
| 0                     | 1    | Identifier                | Identifier - Type of Serial Module - See SFF-8024.  |
| 1                     | 1    | Revision Compliance       | Identifier – CMIS revision; the upper nibble is the whole number part and the lower nibble is the decimal part.<br>Example: 01h indicates version 0.1, 21h indicates version 2.1. |
| 2-3                   | 2    | ID and Status Area        | Flat mem indication, CLEI present indicator, Maximum TWI speed, Current state of Module, Current state of the Interrupt signal.   |
| 4-7                   | 4    | Lane Flag Summary         | Flag summary of all lane flags on pages 10h-1Fh.  |
| 8-13                  | 6    | Module-Level Flags        | All flags that are not lane or data path specific.  |
| 14-25                 | 12   | Module-Level Monitors     | Monitors that are not lane or data path specific.   |
| 26-30                 | 5    | Module Global Controls    | Controls applicable to the module as a whole  |
| 31-36                 | 6    | Module-Level Flag Masks   | Masking bits for the Module-Level flags   |
| 37-38                 | 2    | CDB Status Area           | Status of most recent CDB command   |
| 39-40                 | 2    | Module Firmware Version   | Module Firmware Version.  |
| 41-63                 | 23   | Reserved Area             | Reserved for future standardization   |
| 64-82                 | 19   | Custom Area               | Vendor or module type specific use  |
| 83-84                 | 2    | Inactive Firmware Version | Version Number of Inactive Firmware. Values of 00h indicates module supports only a single image.   |
| 85-117                | 33   | Application Advertising   | Combinations of host and media interfaces that are supported by module data path(s)   |
| 118-125               | 8    | Password Entry and Change | Password Entry and Change   |
| 126                   | 1    | Bank Select Byte          | Bank address of currently visible Page  |
| 127                   | 1    | Page Select Byte          | Page address of currently visible Page  |
| <b>Upper Page 00h</b> |      |                           |   |
| 128                   | 1    | Identifier                | Identifier - Type of Serial Module - See SFF-8024.  |
| 129-144               | 16   | Vendor name               | Vendor name (ASCII)   |
| 145-147               | 2    | Vendor OUI                | Vendor IEEE company ID  |
| 148-163               | 16   | Vendor PN                 | Part number provided by vendor (ASCII)  |
| 164-165               | 8    | Vendor rev                | Revision level for part number provided by vendor (ASCII)   |
| 166-181               | 10   | Vendor SN                 | Vendor Serial Number (ASCII)  |
| 182-183               | 2    | Date code year            | ASCII code, two low order digits of year (00=2000)  |
| 184-185               | 2    | Date code month           | ASCII code digits of month (01=Jan through 12=Dec)  |
| 186-187               | 2    | Date code day of month    | ASCII code day of month (01-31)   |
| 188-189               | 2    | Lot code                  | ASCII code, custom lot code, may be blank   |
| 190-199               | 10   | CLEI code                 | Common Language Equipment Identification code   |

|         |    |                                 |   |
|---------|----|---------------------------------|---|
| 200-201 | 2  | Module power characteristics    | Module power characteristics                                    |
| 202     | 1  | Cable assembly length           | Cable assembly length   |
| 203     | 1  | Media Connector Type            | Media Connector Type  |
| 204     | 1  | 5 GHz attenuation               | Passive copper cable attenuation at 5 GHz in 1 dB increments    |
| 205     | 1  | 7 GHz attenuation               | Passive copper cable attenuation at 7 GHz in 1 dB increments    |
| 206     | 1  | 12.9 GHz attenuation            | Passive copper cable attenuation at 12.9 GHz in 1 dB increments |
| 207     | 1  | 25.8 GHz attenuation            | Passive copper cable attenuation at 25.8 GHz in 1 dB increments |
| 208-209 | 2  | Reserved                        | Reserved  |
| 210-211 | 2  | Cable Assembly Lane Information | Cable Assembly Lane Information                                 |
| 212     | 1  | Media Interface Technology      | Media Interface Technology                                      |
| 213-220 | 8  | Reserved                        | Reserved  |
| 221     | 1  | Custom                          | Custom  |
| 222     | 1  | Checksum                        | Includes bytes 128-221  |
| 223-255 | 33 | Custom Info NV                  | Custom Info NV  |

## Mechanical Dimension

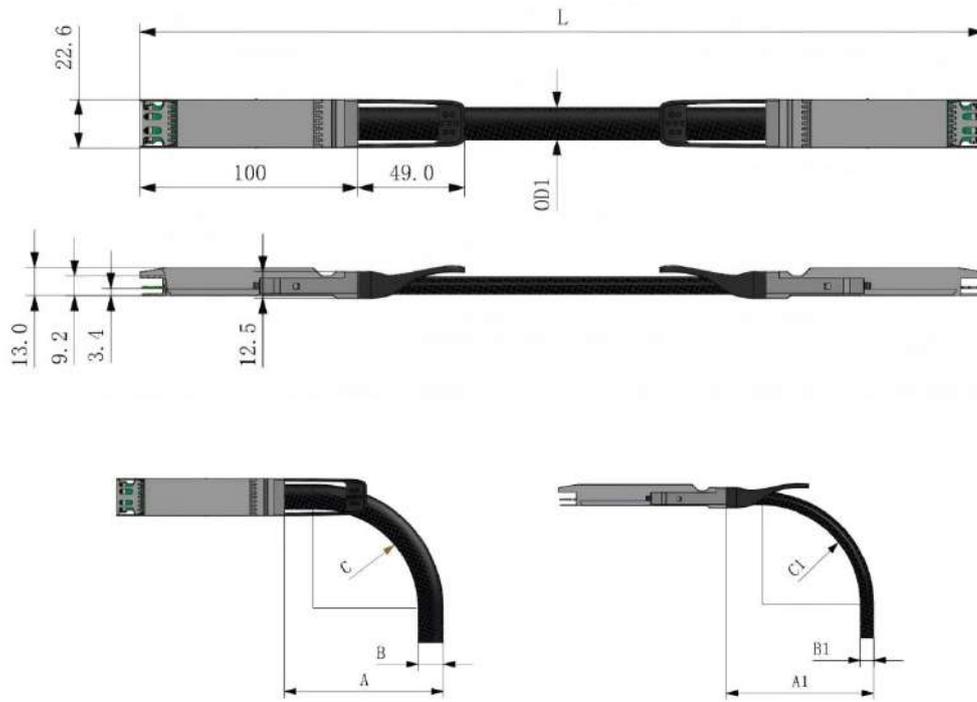

### Note:

- Unit: mm
- Tolerance:  $\varphi 0.1\text{mm}$  if not shown
- Latch color: black
- When  $L < 5\text{m}$ , the tolerance is  $\pm 50\text{mm}$ , when  $L \geq 5\text{m}$ , the tolerance is  $\pm 1\%$


### Waring:

- The transceiver optics is supplied with a dust cover. This plug protects the transceiver optics during standard manufacturing processes by preventing contamination from air borne particles. It is recommended that the dust cover remain in the transceiver whenever an optical fiber connector is not inserted.
- Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.
- Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

## Test Center

### 1. Performance Testing

Every fiber optic transceiver is thoroughly tested by the LSOLINK Assurance Program, which is equipped with the world's most advanced analytical equipment to ensure that our transceivers meet the industry's international public protocol standards while still functioning flawlessly in your facility.

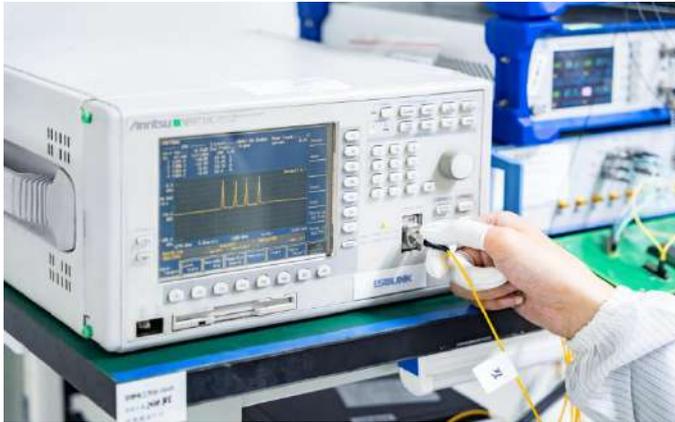

#### Optical Spectrum Inspection

Using the industry's leading optical spectrum analyser to check in real time that the parameters of the optical transceiver's laser comply with industry standards.

- **Peak:** Peak wavelength and peak level
- **2nd Peak:** Side-mode wavelength and level
- **Mean Wl:** Center wavelength
- **Total Power:** Total power of spectrum
- **SMSR:** Side-Mode Suppression Ratio



#### Optical Signal Quality Inspection

Using highly efficient sampling oscilloscopes and BERT testers, equipped with an automated test platform to accurately test the signal quality of the transceiver, test records are kept for up to 5 years to ensure the traceability of each transceiver.

- **Eye Mask Margin(NRZ)**
- **TDECQ(PAM4):** transmitter dispersion eye closure
- **OMA:** Optical modulation amplitude
- **BER:** Bit error rate
- **ER:** Extinction Ratio



#### Flow Pressure Test

Using multi-protocol network traffic analyser with various brands of switches to test the transceiver's ability to transmit at full speed.

- **Bandwidth:** Actual transceiver bandwidth on the port
- **Packet Loss**
- **Packet Errors:** CRC Errors/PCS Errors/Symbol Errors
- **LinkDown Counts**
- **latency**

Above is part of our test bed network equipment. For more information, Please click [download](#) for optical transceiver performance test report.

## 2. Quality Control

We adopt advanced quality management solutions. Each transceiver is self-inspected, including:20x microscope inspection, 200x microscope inspection, and QC process inspection.



**visual inspection**



**Microscopic inspection: 20X**



**Microscopic inspection: 200X**



**Reliability Verification**



**Optical endface inspection**



**OQC Inspection**

## Order Information

| Part Number   | Length(m) | Wire Gauge(AWG) | Connector Type | Cable Type              | Cable Jacket |
|---------------|-----------|-----------------|----------------|-------------------------|--------------|
| 800G-OSFP-AE4 | 4         | 30              | OSFP to OSFP   | Active Electrical Cable | PVC          |
| 800G-OSFP-AE5 | 5         | 28              | OSFP to OSFP   | Active Electrical Cable | PVC          |
| 800G-OSFP-AE6 | 6         | 28              | OSFP to OSFP   | Active Electrical Cable | PVC          |
| 800G-OSFP-AE7 | 7         | 26              | OSFP to OSFP   | Active Electrical Cable | PVC          |

## Further Information

 | Lighting the Path to Global Links

 **Web** | [www.lsolink.com](http://www.lsolink.com)

 **Email** | For [Sales@lsolink.com](mailto:Sales@lsolink.com)

## Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. LSOLINK assumes no responsibility for the use or reliability of equipment or software not provided by LSOLINK. Copyright LSOLINK.COM All Rights